

FRAME 1114B**WINDING M****MODELS LLB1114B**

REF: F1114BWM-0 FEBRUARY 2011

WINDING DETAILS

Code	M	Insulation class	H
Phase	1	Leads	4
Pole number	4	Pitch	2/3

MECHANICAL DETAILS

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m ³ /s 0.06/0.072

EXCITATION DETAILS

Excitation system	SHUNT
AVR model	R220
Sustained short-circuit current	-
Steady state voltage regulation	±1%

WAVEFORM

<i>No load or linear rated load</i>	
Total harmonic content THC	<5%
Telephone influence factor TIF (NEMA)	<100
Telephone harmonic factor THF (IEC)	<3%

VOLTAGE

Frequency / speed	Series	V	50Hz / 1500rpm			60Hz / 1800rpm		
			220	230	240	220	230	240
Parallel		V	110	115	120	110	115	120

RATING*Power factor 1.0, Altitude <=1000m*

Class	rise	BR	125/40	150/40	163/27	105/40	kVA	8.0	8.0	8.0	8.6	9.0	9.0
Class H	rise	BR	125/40	150/40	163/27	105/40	kVA	8.0	8.0	8.0	8.6	9.0	9.0
							kW	8.0	8.0	8.0	8.6	9.0	9.0
Class H	rise	PR	150/40	163/27	105/40		kVA	8.5	8.5	8.5	9.1	9.5	9.5
							kW	8.5	8.5	8.5	9.1	9.5	9.5
Class H	rise	PR	163/27	105/40			kVA	8.8	8.8	8.8	9.5	9.9	9.9
							kW	8.8	8.8	8.8	9.5	9.9	9.9
Class F	rise	BR	105/40				kVA	7.3	7.3	7.3	7.8	8.2	8.2
							kW	7.3	7.3	7.3	7.8	8.2	8.2

EFFICIENCIES*Power factor 1.0*

Efficiency	Class	rise	BR	%	78.4	78.7	78.5	78.6	79.0	79.8
110%	Class H	BR		%	78.4	78.7	78.5	78.6	79.0	79.8
100%	Class H	BR		%	80.0	80.3	80.1	79.8	80.1	80.9
75%	Class H	BR		%	82.8	82.9	82.7	82.3	82.6	83.1
50%	Class H	BR		%	84.1	83.9	83.3	83.7	83.8	84.0
25%	Class H	BR		%	81.1	80.2	78.9	80.9	80.9	80.4

CHARACTERISTIC PARAMETERS*Reactance base class H BR rating*

Parameter	Description	Unit	0.59	0.64	0.76	0.42	0.44	0.47
K _c	Short-circuit ratio		0.59	0.64	0.76	0.42	0.44	0.47
X _d	D-Axis synchronous reactance (unsaturated)	pu	4.58	4.19	3.85	5.91	5.66	5.19
X' _d	D-Axis transient reactance (saturated)	pu	0.99	0.90	0.83	1.27	1.22	1.12
X'' _d	D-Axis sub-transient reactance (saturated)	pu	0.493	0.451	0.414	0.635	0.608	0.559
X _q	Q-Axis synchronous reactance (unsaturated)	pu	2.29	2.09	1.92	2.95	2.83	2.60
X'' _q	Q-Axis sub-transient reactance (saturated)	pu	0.873	0.798	0.733	1.126	1.078	0.990
X ₂	Negative-sequence reactance (saturated)	pu	-	-	-	-	-	-
X ₀	Zero-sequence reactance (independent)	pu	-	-	-	-	-	-
T' _d	D-Axis transient time constant	ms		74			74	
T'' _d	D-Axis sub-transient time constant	ms		7.4			7.4	
T' _{do}	D-Axis open-circuit time constant	ms		344			344	
T _a	Armature time constant	ms		11.1			11.1	
T _r	Voltage recovery time	ms		< 300			< 300	

EXCITATION VOLTAGE AND CURRENT

Parameter	Unit	8.7	9.5	10.3	6.6	7.0	7.5
No load excitation voltage	V	8.7	9.5	10.3	6.6	7.0	7.5
No load excitation current	A	0.71	0.77	0.84	0.54	0.57	0.61
Class H BR excitation voltage	V	25.0	25.3	26.4	22.8	23.2	22.9
Class H BR excitation current	A	2.03	2.06	2.15	1.85	1.89	1.86

WINDING RESISTANCE*At 20° C*

Parameter	Unit	0.420	Exciter field	Ω	12.3
Stator (series)	Ω	0.420	Exciter field	Ω	12.3
Main field	Ω	2.68			

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

FRAME 1114B

WINDING M




MODELS LLB1114B

REF: F1114BWM-0 FEBRUARY 2011


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.9

50 Hz SHUNT

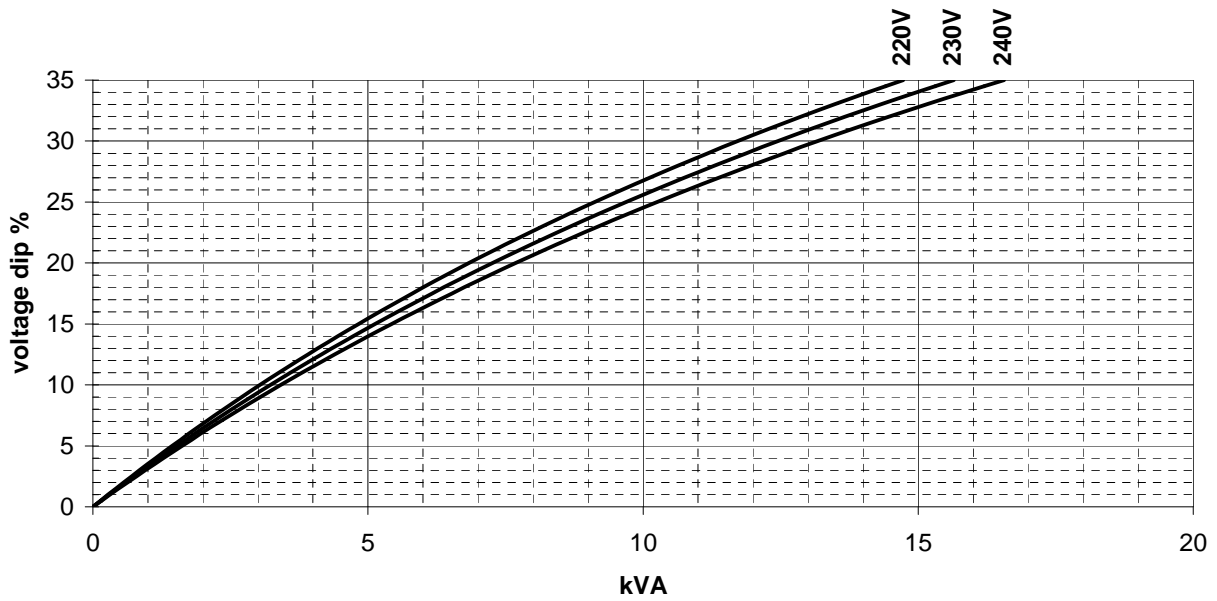


60 Hz SHUNT

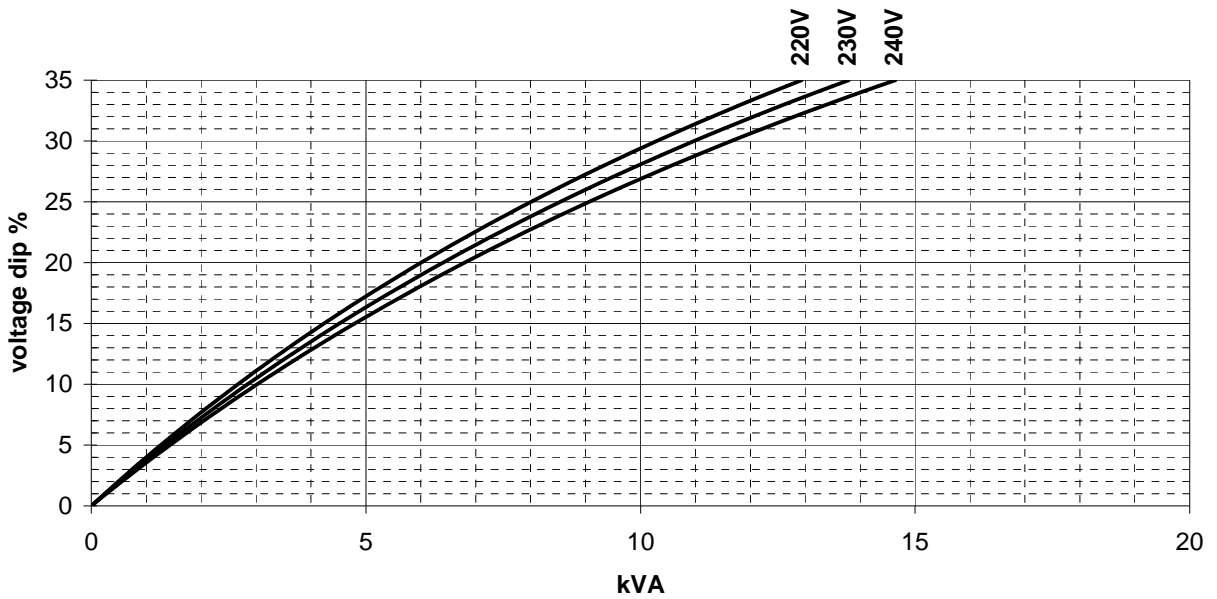

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

FRAME 1114B**WINDING M****MODELS LLB1114B**

REF: F1114BWM-0 FEBRUARY 2011

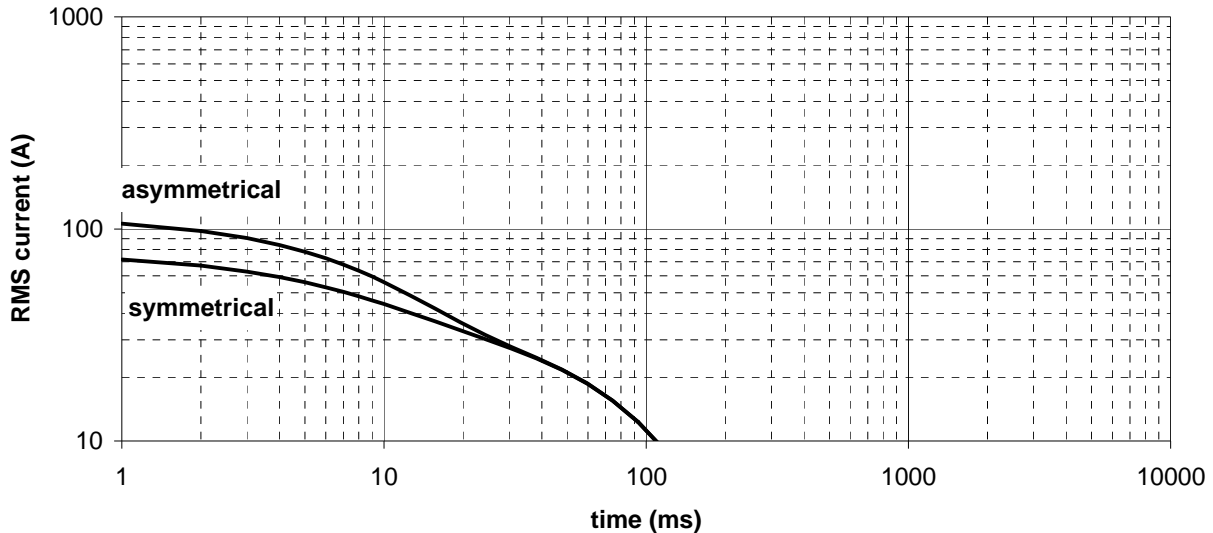SHORT-CIRCUIT DECREMENT CURVES*No-load excitation at rated speed***230V 50Hz***Series***Multiplication Factors****50Hz Voltages**

	220	230	240
Multiplication Factor	0.96	1.00	1.04

*Apply factor up to 2xT'd, remainder of curve unchanged***60Hz Voltages**

	220	230	240
Multiplication Factor	0.80	0.83	0.87

*Apply factor up to 2xT'd, remainder of curve unchanged***Winding Connection**

	Series	Parallel
Multiplication Factor	1.00	2.00

Apply factor to the complete curve