

P40P3 / P44E3



www.FGWilson.com



Output Ratings		
Generating Set Model	P40P3 Prime*	P44E3 Standby*
380-415V, 50 Hz	40.0 kVA 32.0 kW	44.0 kVA 35.2 kW
480V, 60 Hz	45.0 kVA 36.0 kW	50.0 kVA 40.0 kW

* Refer to ratings definitions on page 4.

Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Perkins 1103A-33TG1	
Alternator Model:	LL2014B	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	175 (46.2)	
Fuel Consumption: P40P3 l/hr (US gal/hr)	9.4 (2.5)	10.7 (2.8)
Fuel Consumption: P44E3 l/hr (US gal/hr)	10.3 (2.7)	11.9 (3.1)



FG Wilson has manufacturing facilities in the following locations:

Northern Ireland · Brazil · China · India · USA

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network. To contact your local Sales Office please visit the FG Wilson website at www.FGWilson.com



Alternator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V 230/115V 200/115V	380/220V 220/110V	220/127V	480/277V 240/139V	380/220V 220/110V	240/120V 208/120V	230/115V	440/254V 220/127V
Motor Starting Capability* kVA	89	84	76	99	98	65	76	71	84
Short Circuit Capacity** %	300	300	300	300	300	300	300	300	300
Reactances: Per Unit									
Xd	2.370	2.550	2.820	2.110	2.390	3.810	3.180	3.440	2.840
X'd	0.100	0.110	0.120	0.090	0.110	0.170	0.140	0.150	0.120
X''d	0.052	0.056	0.062	0.046	0.053	0.084	0.070	0.076	0.063

Reactances shown are applicable to prime ratings

* Based on 30% voltage dip. Improved motor starting capability is available with optional Permanent Magnet generator or AREP excitation.

** With optional Permanent Magnet generator or AREP excitation.

Alternator Technical Data

Physical Data		Operating Data		
Manufacturer:	FG WILSON	Overspeed: RPM	2250	
Model:	LL2014B	Voltage Regulation (steady state) (%):	+/- 0.5	
No. of Bearings:	1	Wave Form NEMA = TIF:	50	
Insulation Class:	H	Wave Form IEC = THF:	2.0%	
Winding Pitch Code:	2/3 - 6	Total Harmonic Content LL/LN:	4.0%	
Wires:	12	Radio Interference:	Suppression is in line with European Standard EN61000-6	
Ingress Protection Rating:	IP23	Radiant Heat: kW (Btu/min)		
Excitation System:	SHUNT		-50 Hz:	4.8 (273)
AVR Model:	R230		-60 Hz:	5.5 (313)

Technical Data

3 Phase Ratings and Performance at 50 Hz, 1500 RPM

3 Phase Ratings and Performance at 60 Hz, 1800 RPM

Voltage	Prime Model P40P3		Standby Model P44E3		Voltage	Prime Model P40P3		Standby Model P44E3	
	kVA	kW	kVA	kW		kVA	kW	kVA	kW
415/240V	40.0	32.0	44.0	35.2	480/277V	45.0	36.0	50.0	40.0
400/230V	40.0	32.0	44.0	35.2	220/127V	45.0	36.0	50.0	40.0
380/220V	40.0	32.0	44.0	35.2	380/220V	45.0	36.0	50.0	40.0
230/115V	40.0	32.0	44.0	35.2	240/120V	45.0	36.0	50.0	40.0
220/127V	40.0	32.0	44.0	35.2	230/115V	45.0	36.0	50.0	40.0
220/110V	40.0	32.0	44.0	35.2	440/254V	45.0	36.0	50.0	40.0
200/115V	40.0	32.0	44.0	35.2	220/110V	45.0	36.0	50.0	40.0
					208/120V	45.0	36.0	50.0	40.0
					230/115V	45.0	36.0	50.0	40.0

Definitions

Standby Rating



These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 27°C (80°F) Air Inlet Temp, 152.4m (500ft) A.S.L. 60% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

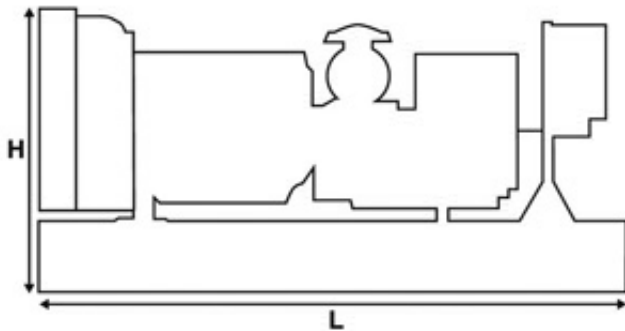

Weights and Dimensions

Weights: kg (lb)		Dimensions: mm (in)	
Net (+ lube oil)	874 (1927)	Length	2150 (84.6)
Wet (+ lube oil & coolant)	884 (1949)	Width	752 (29.6)
Fuel, lube oil & coolant	1029 (2269)	Height	1366 (53.8)

General Data

Documents

A full set of operation and maintenance manuals, circuit wiring diagrams, and commissioning/fault finding instruction leaflets.

Generating Set Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, VDE 0530, NEMA MG-1.22.

FG Wilson is a fully accredited ISO 9001 company.

Warranty

All equipment carries full manufacturer's warranty. Extended warranty terms available. For details on warranty cover please contact your local dealer, or visit our website: www.FGWilson.com