

FRAME FGL70040**WINDING 6S****MODELS FGL70040**

REF: FGL70040W6S-1 SEP 2020

WINDING DETAILS

Code	6S	Insulation class	H
Phase	3	Leads	6
Pole number	4	Pitch	2/3

MECHANICAL DETAILS

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m ³ /s 1.0 / 1.2

EXCITATION DETAILS

Excitation system	SHUNT	PMG
AVR model	R150	R180
Sustained short-circuit current	-	270%:5s
Steady state voltage regulation	±1.0%	±1.0%

WAVEFORM

<i>Line voltage on no load</i>	
Total harmonic content THC	< 3.5%
Telephone influence factor TIF (NEMA)	< 50
Telephone harmonic factor THF (IEC)	< 2%

LINE VOLTAGE*No overvoltage tolerance for 440V 50Hz excitation level*

Frequency / speed	50Hz / 1500rpm				60Hz / 1800rpm						
	V	380	400	415	440	380	400	416	440	460	480
Star	V	220	230	240		220	230	240			
Delta	V										

RATING*Power factor 0.8, Altitude <=1000m*

Class	Rating	kVA	915	920	915	800	905	950	990	1050	1100	1145
Class H rise BR	125/40	kVA	915	920	915	800	905	950	990	1050	1100	1145
		kW	732	736	732	640	724	760	792	840	880	916
Class H rise PR	150/40	kVA	970	975	970	848	959	1007	1049	1113	1166	1214
		kW	776	780	776	678	767	806	840	890	933	971
Class H rise PR	163/27	kVA	1007	1012	1007	880	996	1045	1089	1155	1210	1260
		kW	805	810	805	704	796	836	871	924	968	1008
Class F rise BR	105/40	kVA	833	837	833	728	824	865	901	956	1001	1042
		kW	666	670	666	582	659	692	721	764	801	834

EFFICIENCIES*Power factor 0.8*

Efficiency	Class	%	93.8	94.1	94.3	94.8	93.4	93.7	93.8	94.0	94.2	94.3
110%	Class H BR	%	93.8	94.1	94.3	94.8	93.4	93.7	93.8	94.0	94.2	94.3
100%	Class H BR	%	94.2	94.4	94.6	95.0	93.8	94.0	94.2	94.4	94.5	94.6
75%	Class H BR	%	95.0	95.1	95.2	95.2	94.5	94.7	94.8	94.9	95.0	95.1
50%	Class H BR	%	95.4	95.4	95.4	95.0	94.8	94.9	95.0	95.1	95.1	95.1
25%	Class H BR	%	94.6	94.3	94.0	92.8	93.4	93.5	93.6	93.6	93.6	93.5

CHARACTERISTIC PARAMETERS*Reactance base class H BR rating*

Parameter	Unit	0.33	0.40	0.45	0.67	0.25	0.27	0.29	0.32	0.35	0.38	
K _c	Short-circuit ratio	0.33	0.40	0.45	0.67	0.25	0.27	0.29	0.32	0.35	0.38	
X _d	D-Axis synchronous reactance (unsaturated)	pu	3.38	3.07	2.84	2.21	4.02	3.80	3.67	3.48	3.33	3.18
X' _d	D-Axis transient reactance (saturated)	pu	0.16	0.14	0.13	0.10	0.19	0.18	0.17	0.16	0.16	0.15
X'' _d	D-Axis sub-transient reactance (saturated)	pu	0.127	0.115	0.106	0.083	0.150	0.142	0.137	0.130	0.125	0.119
X _q	Q-Axis synchronous reactance (unsaturated)	pu	1.73	1.57	1.45	1.13	2.05	1.94	1.87	1.77	1.70	1.62
X'' _q	Q-Axis sub-transient reactance (saturated)	pu	0.139	0.126	0.117	0.091	0.165	0.156	0.151	0.143	0.137	0.131
X ₂	Negative-sequence reactance (saturated)	pu	0.133	0.121	0.111	0.087	0.158	0.149	0.144	0.136	0.131	0.125
X ₀	Zero-sequence reactance (independent)	pu	0.006	0.006	0.005	0.004	0.008	0.007	0.007	0.007	0.006	0.006
T' _d	D-Axis transient time constant	ms		100					100			
T'' _d	D-Axis sub-transient time constant	ms		10					10			
T' _{do}	D-Axis open-circuit time constant	ms		2139					2139			
T _a	Armature time constant	ms		15					15			
T _r	Voltage recovery time	ms		< 500					< 500			

EXCITATION VOLTAGE AND CURRENT

Parameter	Unit	10.4	11.7	12.8	15.4	7.7	8.3	8.9	9.7	10.6	11.7
No load excitation voltage	V	10.4	11.7	12.8	15.4	7.7	8.3	8.9	9.7	10.6	11.7
No load excitation current	A	0.90	1.01	1.11	1.33	0.67	0.72	0.77	0.84	0.92	1.01
Class H BR excitation voltage	V	41.5	41.6	41.7	39.4	37.5	38.0	38.6	39.7	40.9	42.3
Class H BR excitation current	A	3.59	3.60	3.61	3.41	3.25	3.29	3.34	3.44	3.54	3.66

WINDING RESISTANCE*At 20°C*

Parameter	Ω	0.004	Exciter field - Shunt	Ω	11.6
Stator line-to-line (series star)	Ω	0.004	Exciter field - Shunt	Ω	11.6
Main field	Ω	0.47			

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL70040 WINDING 6S




MODELS FGL70040

REF: FGL70040W6S-1 SEP 2020


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz SHUNT

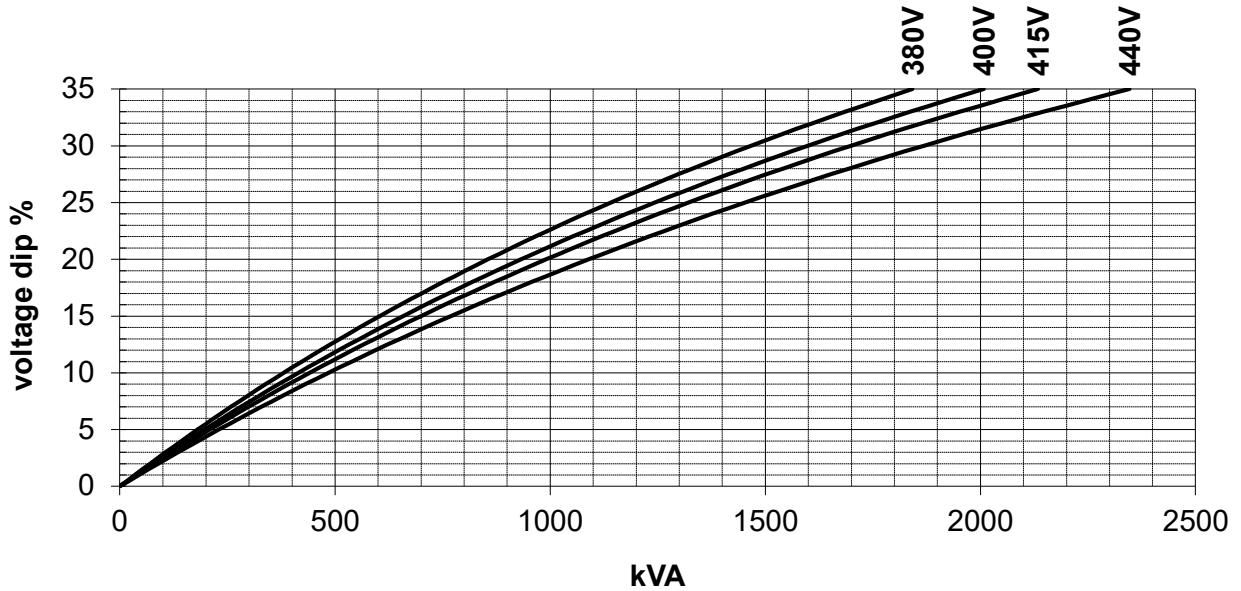

60 Hz SHUNT

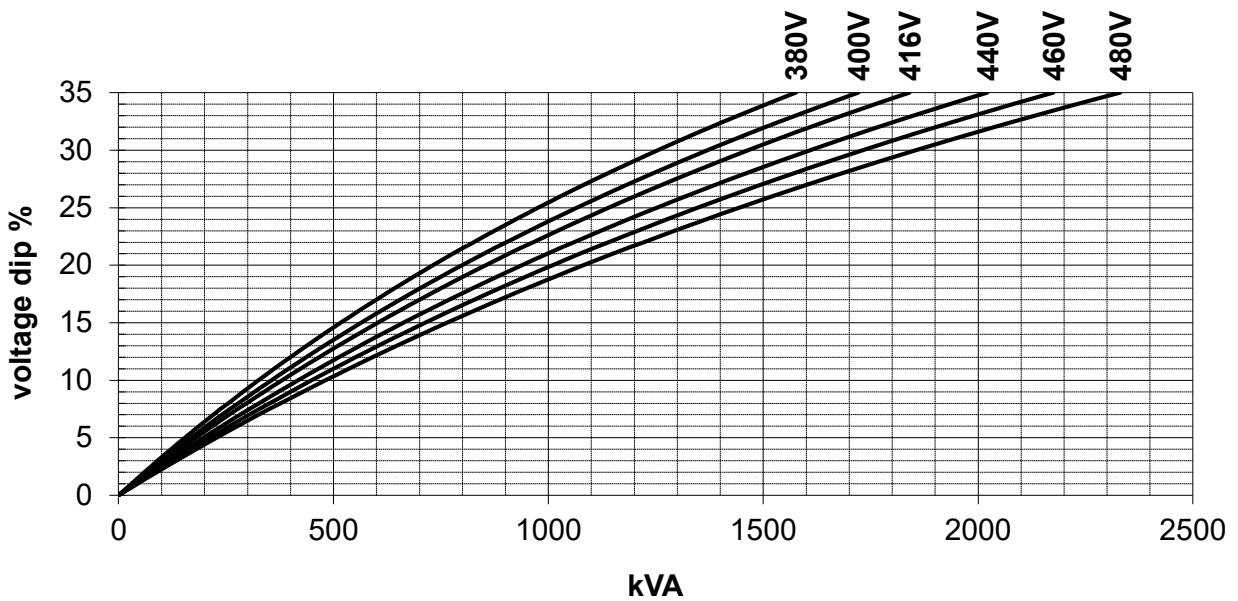

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL70040 WINDING 6S




MODELS FGL70040

REF: FGL70040W6S-1 SEP 2020


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz PMG

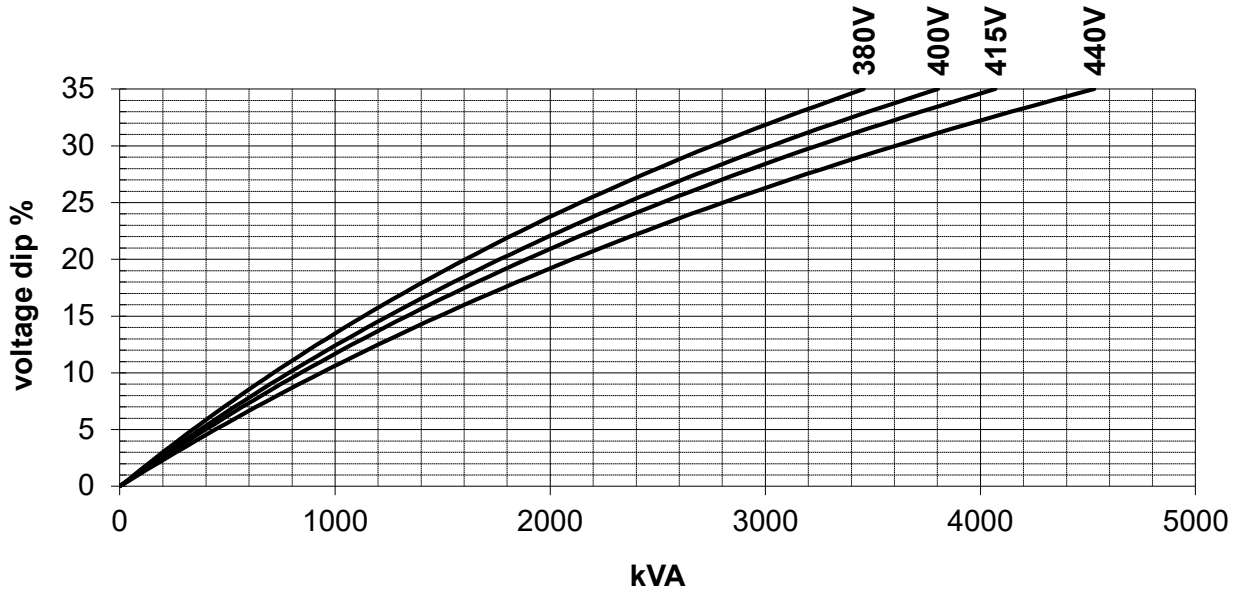

60 Hz PMG

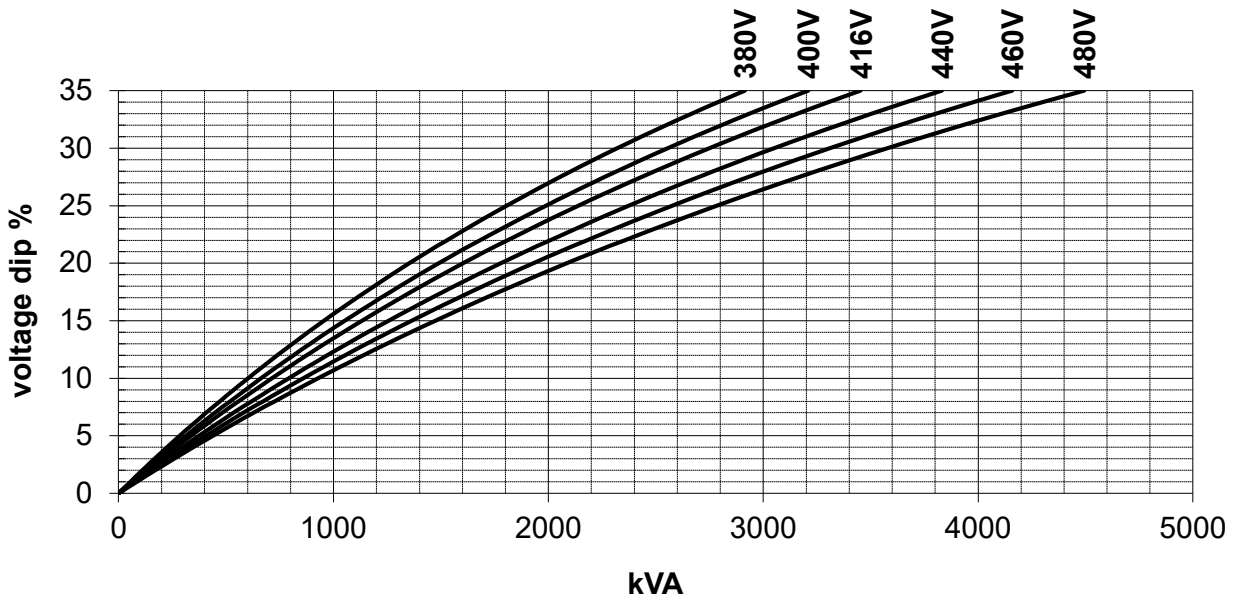

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL70040 WINDING 6S



MODELS FGL70040


REF: FGL70040W6S-1 SEP 2020

THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES

No-load excitation at rated speed

400V 50Hz, 480V 60Hz

Star

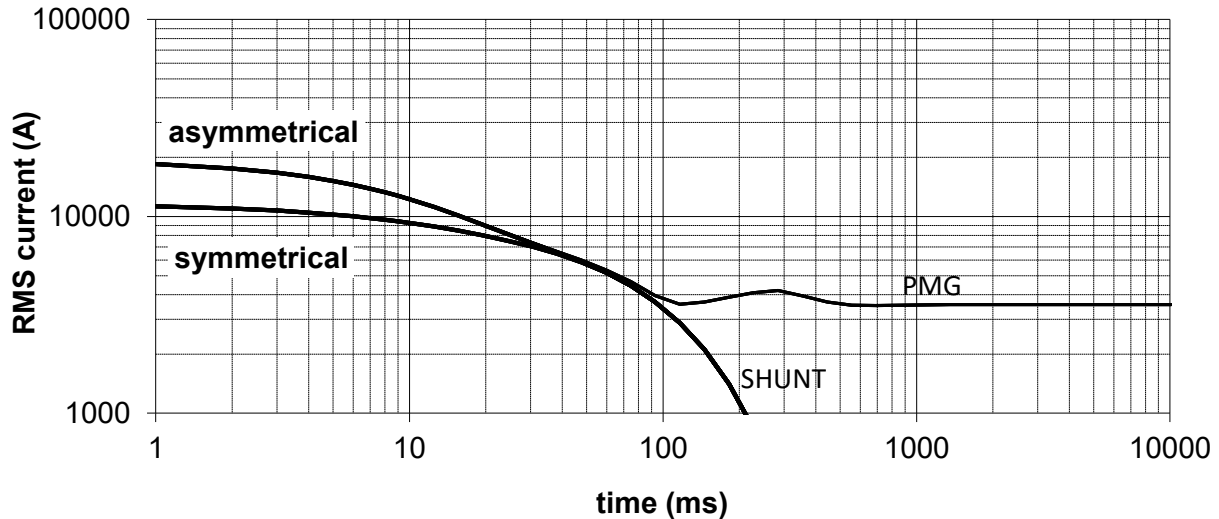

Multiplication Factors

50Hz Voltages	380	400	415	440
Multiplication Factor	0.95	1.00	1.04	1.10

Apply factor up to 2xT'd, remainder of curve unchanged

60Hz Voltages	380	400	416	440	460	480
Multiplication Factor	0.79	0.83	0.87	0.92	0.96	1.00

Apply factor up to 2xT'd, remainder of curve unchanged

Winding Connection	Star	Delta
Multiplication Factor	1.00	1.73

Apply factor to the complete curve

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
 Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
 Manufactured for FG Wilson by Leroy Somer - Nidec.