

**FRAME**

**1504N**

**WINDING**

**6**



**MODELS**

**LL1514N/LL1524N/LL1534N**

REF: F1504NW6-1

NOVEMBER 2012

**WINDING DETAILS**

|             |   |                  |       |
|-------------|---|------------------|-------|
| Code        | 6 | Insulation class | H     |
| Phase       | 3 | Leads            | 12    |
| Pole number | 4 | Pitch            | 0.667 |

**MECHANICAL DETAILS**

|                     |                            |
|---------------------|----------------------------|
| Standard protection | IP23                       |
| Overspeed           | rpm 2250                   |
| Air flow 50Hz/60Hz  | m <sup>3</sup> /s 0.1/0.13 |

**EXCITATION DETAILS**

|                                 |              |                 |
|---------------------------------|--------------|-----------------|
| Excitation system               | <b>SHUNT</b> | <b>AREP/PMG</b> |
| AVR model                       | R220         | R438            |
| Sustained short-circuit current | -            | 300             |
| Steady state voltage regulation | +/- 0.5%     | +/- 0.5%        |

**WAVEFORM**

*Line voltage on no load or balanced linear rated load*

|                                       |      |
|---------------------------------------|------|
| Total harmonic content THC            | < 2% |
| Telephone influence factor TIF (NEMA) | < 50 |
| Telephone harmonic factor THF (IEC)   | < 2% |

**LINE VOLTAGE**

*No overvoltage tolerance for 440V 50Hz excitation level*

| Frequency / speed | 50Hz / 1500rpm |     |     |     |     | 60Hz / 1800rpm |     |     |     |     |     |     |
|-------------------|----------------|-----|-----|-----|-----|----------------|-----|-----|-----|-----|-----|-----|
|                   | Series star    | V   | 380 | 400 | 415 | 440            | 380 | 400 | 416 | 440 | 460 | 480 |
| Series delta      | V              | 220 | 230 | 240 | 240 | 240            | 220 | 230 | 240 | 240 | 240 | 240 |
| Parallel star     | V              |     | 200 | 208 | 220 | 220            | 200 | 208 | 220 | 230 | 240 | 240 |

**RATING**

*Power factor 0.8, Altitude <=1000m*

| Class           | Rating | kVA | 50.0 | 50.0 | 50.0 | 43.0 | 51.5 | 54.0 | 56.5 | 59.5 | 62.5 | 62.5 |
|-----------------|--------|-----|------|------|------|------|------|------|------|------|------|------|
| Class H rise BR | 125/40 | kVA | 50.0 | 50.0 | 50.0 | 43.0 | 51.5 | 54.0 | 56.5 | 59.5 | 62.5 | 62.5 |
|                 |        | kW  | 40.0 | 40.0 | 40.0 | 34.4 | 41.2 | 43.2 | 45.2 | 47.6 | 50.0 | 50.0 |
| Class H rise PR | 150/40 | kVA | 53.0 | 53.0 | 53.0 | 45.6 | 54.6 | 57.2 | 59.9 | 63.1 | 66.3 | 66.3 |
|                 |        | kW  | 42.4 | 42.4 | 42.4 | 36.5 | 43.7 | 45.8 | 47.9 | 50.5 | 53.0 | 53.0 |
| Class H rise PR | 163/27 | kVA | 55.0 | 55.0 | 55.0 | 47.3 | 56.7 | 59.4 | 62.5 | 65.5 | 68.8 | 68.8 |
|                 |        | kW  | 44.0 | 44.0 | 44.0 | 37.8 | 45.3 | 47.5 | 50.0 | 52.4 | 55.0 | 55.0 |
| Class F rise BR | 105/40 | kVA | 45.5 | 45.5 | 45.5 | 39.1 | 46.9 | 49.1 | 51.4 | 54.1 | 56.9 | 56.9 |
|                 |        | kW  | 36.4 | 36.4 | 36.4 | 31.3 | 37.5 | 39.3 | 41.1 | 43.3 | 45.5 | 45.5 |

**EFFICIENCIES**

*Power factor 0.8*

| Efficiency | Class      | % | 88.8 | 89.2 | 89.2 | 89.6 | 89.0 | 89.3 | 89.5 | 89.8 | 89.8 | 90.1 |
|------------|------------|---|------|------|------|------|------|------|------|------|------|------|
| 110%       | Class H BR | % | 88.8 | 89.2 | 89.2 | 89.6 | 89.0 | 89.3 | 89.5 | 89.8 | 89.8 | 90.1 |
| 100%       | Class H BR | % | 89.4 | 89.7 | 89.7 | 89.9 | 89.6 | 89.9 | 90.1 | 90.3 | 90.3 | 90.5 |
| 75%        | Class H BR | % | 90.7 | 90.8 | 90.7 | 90.3 | 91.0 | 91.2 | 91.3 | 91.4 | 91.4 | 91.5 |
| 50%        | Class H BR | % | 91.5 | 91.3 | 91.1 | 89.9 | 91.9 | 92.0 | 92.0 | 92.0 | 92.0 | 91.8 |
| 25%        | Class H BR | % | 90.2 | 89.6 | 88.9 | 86.2 | 91.0 | 90.9 | 90.8 | 90.6 | 90.4 | 89.8 |

**CHARACTERISTIC PARAMETERS**

*Reactance base class H BR rating*

| Parameter   | Unit | 0.38  | 0.45    | 0.52  | 0.78  | 0.28  | 0.30  | 0.31  | 0.35    | 0.37  | 0.43  |
|---|------|-------|---------|-------|-------|-------|-------|-------|---------|-------|-------|
| K <sub>c</sub> Short-circuit ratio                          |      | 0.38  | 0.45    | 0.52  | 0.78  | 0.28  | 0.30  | 0.31  | 0.35    | 0.37  | 0.43  |
| X <sub>d</sub> D-Axis synchronous reactance (unsaturated)   | pu   | 2.96  | 2.67    | 2.48  | 1.90  | 3.66  | 3.46  | 3.35  | 3.15    | 3.03  | 2.78  |
| X' <sub>d</sub> D-Axis transient reactance (saturated)      | pu   | 0.16  | 0.14    | 0.13  | 0.10  | 0.19  | 0.18  | 0.18  | 0.17    | 0.16  | 0.15  |
| X'' <sub>d</sub> D-Axis sub-transient reactance (saturated) | pu   | 0.079 | 0.071   | 0.066 | 0.050 | 0.097 | 0.092 | 0.089 | 0.084   | 0.080 | 0.074 |
| X <sub>q</sub> Q-Axis synchronous reactance (unsaturated)   | pu   | 1.48  | 1.34    | 1.24  | 0.95  | 1.83  | 1.73  | 1.67  | 1.58    | 1.51  | 1.39  |
| X'' <sub>q</sub> Q-Axis sub-transient reactance (saturated) | pu   | 0.111 | 0.100   | 0.093 | 0.071 | 0.137 | 0.130 | 0.125 | 0.118   | 0.113 | 0.104 |
| X <sub>2</sub> Negative-sequence reactance (saturated)      | pu   | 0.095 | 0.085   | 0.079 | 0.061 | 0.117 | 0.111 | 0.107 | 0.101   | 0.097 | 0.089 |
| X <sub>0</sub> Zero-sequence reactance (independent)        | pu   | 0.009 | 0.008   | 0.008 | 0.006 | 0.011 | 0.011 | 0.010 | 0.010   | 0.009 | 0.008 |
| T' <sub>d</sub> D-Axis transient time constant              | ms   |       | 50      |       |       |       |       |       | 50      |       |       |
| T'' <sub>d</sub> D-Axis sub-transient time constant         | ms   |       | 5       |       |       |       |       |       | 5       |       |       |
| T' <sub>do</sub> D-Axis open-circuit time constant          | ms   |       | 941     |       |       |       |       |       | 941     |       |       |
| T <sub>a</sub> Armature time constant                       | ms   |       | 7.5     |       |       |       |       |       | 7.5     |       |       |
| T <sub>r</sub> Voltage recovery time                        | ms   |       | < 500ms |       |       |       |       |       | < 500ms |       |       |

**EXCITATION VOLTAGE AND CURRENT**

| Parameter                     | Unit | 8.9  | 10.0 | 11.0 | 13.5 | 6.6  | 7.1  | 7.5  | 8.2  | 8.9  | 9.8  |
|-------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| No load excitation voltage    | V    | 8.9  | 10.0 | 11.0 | 13.5 | 6.6  | 7.1  | 7.5  | 8.2  | 8.9  | 9.8  |
| No load excitation current    | A    | 0.50 | 0.57 | 0.63 | 0.77 | 0.38 | 0.40 | 0.43 | 0.47 | 0.51 | 0.56 |
| Class H BR excitation voltage | V    | 32.4 | 32.9 | 33.8 | 33.0 | 30.0 | 30.5 | 31.2 | 32.1 | 33.4 | 33.8 |
| Class H BR excitation current | A    | 1.84 | 1.87 | 1.92 | 1.88 | 1.71 | 1.73 | 1.77 | 1.82 | 1.90 | 1.92 |

**WINDING RESISTANCE**

*At 20°C*

| Parameter                         | Ω | 0.227 | Exciter field | Ω | 17.6 |
|-----------------------------------|---|-------|---------------|---|------|
| Stator line-to-line (series star) | Ω | 0.227 | Exciter field | Ω | 17.6 |
| Main field                        | Ω | 0.87  |               |   |      |

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 1504N WINDING 6**




**MODELS LL1514N/LL1524N/LL1534N**


REF: F1504NW6-1 NOVEMBER 2012

**LOCKED ROTOR MOTOR STARTING CURVES** *Power factor 0.6*

**50 Hz SHUNT**

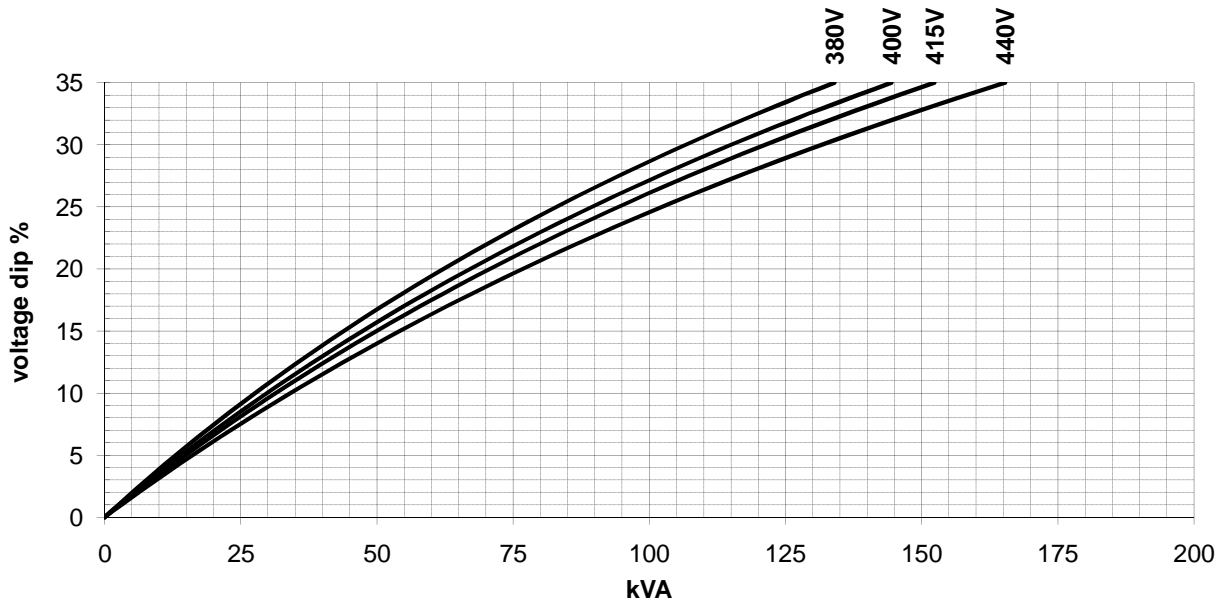

**50 Hz AREP/PMG**

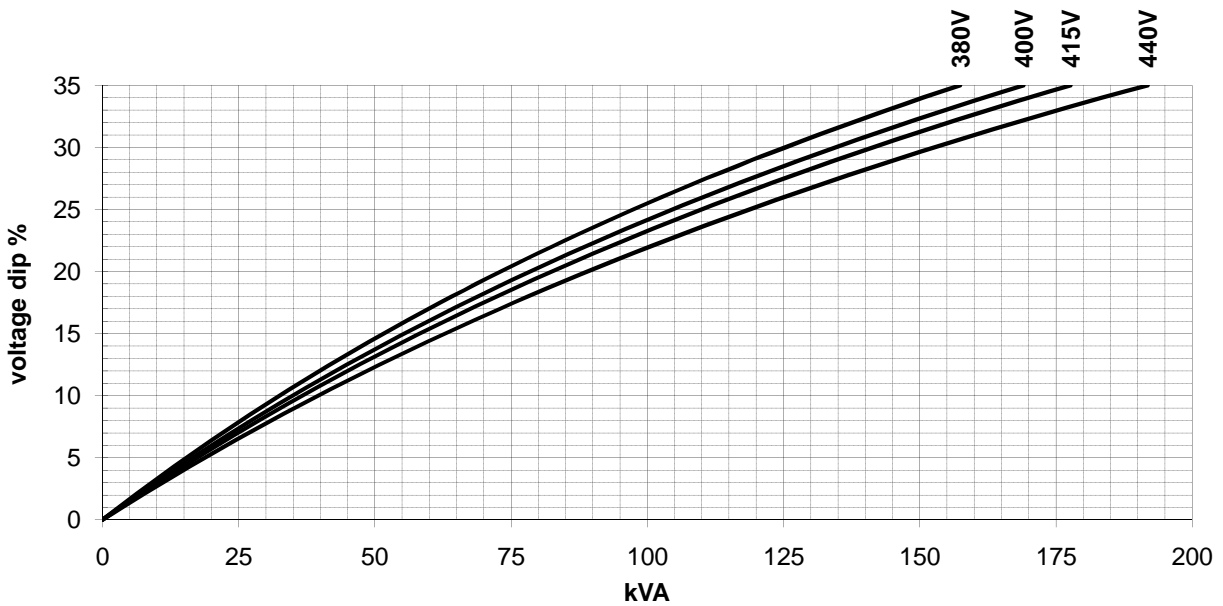

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME**

**1504N**

**WINDING**

**6**




**MODELS** LL1514N/LL1524N/LL1534N

REF: F1504NW6-1 NOVEMBER 2012


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**60 Hz SHUNT**

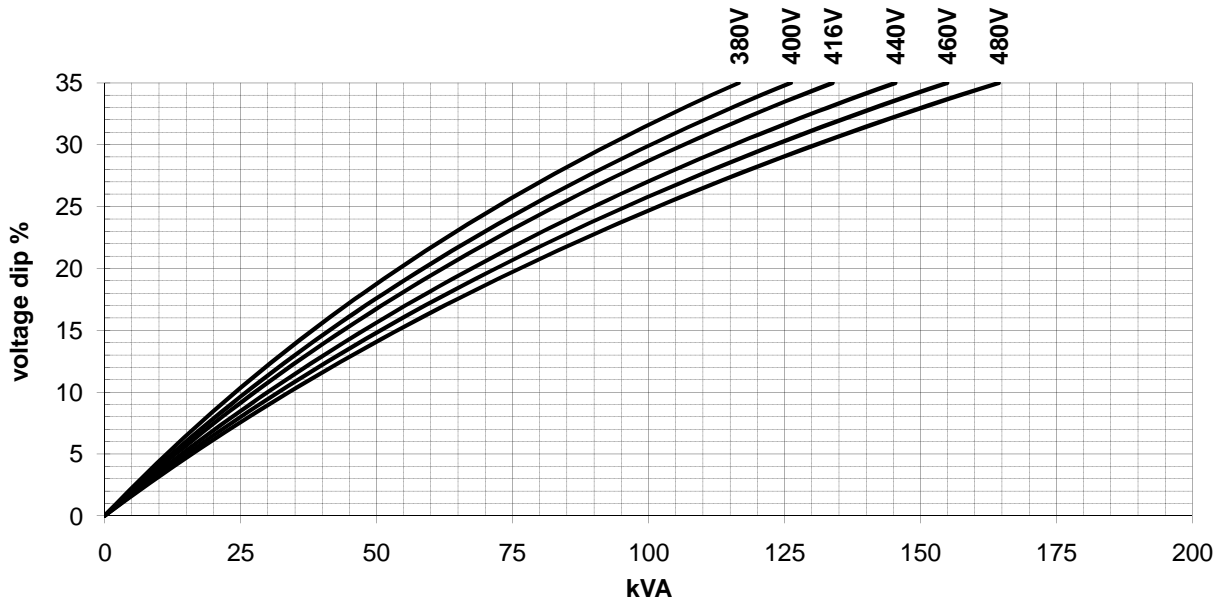

**60 Hz AREP/PMG**

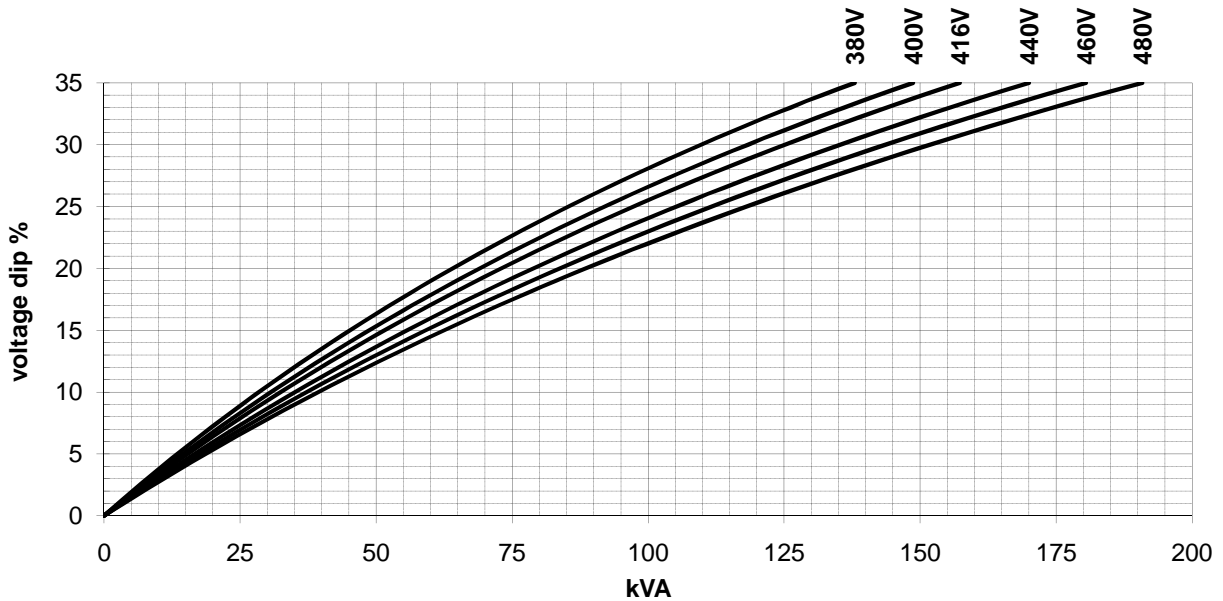

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.




**THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES**

*No-load excitation at rated speed*

**400V 50Hz, 480V 60Hz**

*Series star*

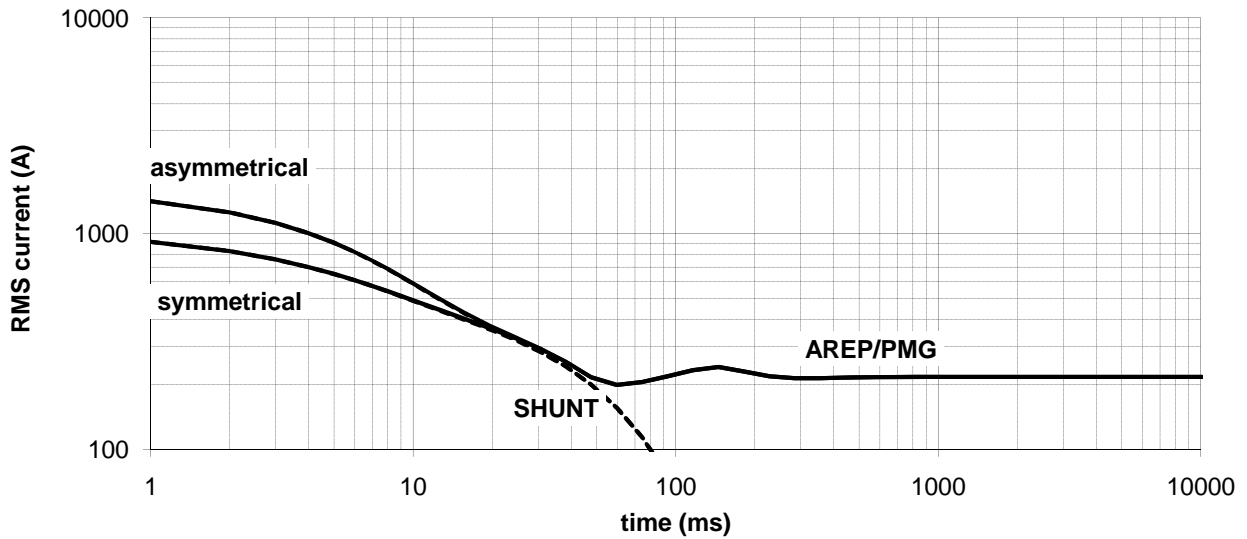

**Multiplication Factors**

**50Hz Voltages**

|                              |            |            |            |      |
|------------------------------|------------|------------|------------|------|
| <b>380</b>                   | <b>400</b> | <b>415</b> | <b>440</b> |      |
| <b>Multiplication Factor</b> | 0.95       | 1.00       | 1.04       | 1.10 |

*Apply factor up to 2xT'd, remainder of curve unchanged*

**60Hz Voltages**

|                              |            |            |            |            |            |      |
|------------------------------|------------|------------|------------|------------|------------|------|
| <b>380</b>                   | <b>400</b> | <b>416</b> | <b>440</b> | <b>460</b> | <b>480</b> |      |
| <b>Multiplication Factor</b> | 0.79       | 0.83       | 0.87       | 0.92       | 0.96       | 1.00 |

*Apply factor up to 2xT'd, remainder of curve unchanged*

**Winding Connection**

|                              |                      |                     |      |
|------------------------------|----------------------|---------------------|------|
| <b>Series Star</b>           | <b>Parallel Star</b> | <b>Series Delta</b> |      |
| <b>Multiplication Factor</b> | 1.00                 | 2.00                | 1.73 |

*Apply factor to the complete curve*