

**FRAME FGL30120 WINDING 6S**



**MODELS FGL30120**

REF: FGL30120W6S-1 SEP 2020

**WINDING DETAILS**

Code	6S	Insulation class	H
Phase	3	Leads	4
Pole number	4	Pitch	2/3

**MECHANICAL DETAILS**

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m <sup>3</sup> /s 0.25 / 0.3

**EXCITATION DETAILS**

Excitation system	<b>SHUNT</b>	<b>PMG</b>
AVR model	R120	R180
Sustained short-circuit current	-	270%:5s
Steady state voltage regulation	±1.0%	±1.0%

**WAVEFORM**

*Line voltage on no load or balanced linear rated load*

Total harmonic content THC	< 2%
Telephone influence factor TIF (NEMA)	< 50
Telephone harmonic factor THF (IEC)	< 2%

**LINE VOLTAGE**

*No overvoltage tolerance for 440V 50Hz excitation level*

Frequency / speed	V	50Hz / 1500rpm				60Hz / 1800rpm						
		380	400	415	440	380	400	416	440	460	480	
Star												

**RATING**

*Power factor 0.8, Altitude <=1000m*

<b>Class H rise BR</b>	<b>125/40</b>	<b>kVA</b>	<b>192</b>	<b>200</b>	<b>200</b>	<b>192</b>	<b>200</b>	<b>209</b>	<b>215</b>	<b>230</b>	<b>240</b>	<b>250</b>
		<i>kW</i>	<i>154</i>	<i>160</i>	<i>160</i>	<i>154</i>	<i>160</i>	<i>167</i>	<i>172</i>	<i>184</i>	<i>192</i>	<i>200</i>
<b>Class H rise PR</b>	<b>150/40</b>	<b>kVA</b>	<b>204</b>	<b>212</b>	<b>212</b>	<b>204</b>	<b>212</b>	<b>222</b>	<b>228</b>	<b>244</b>	<b>254</b>	<b>265</b>
		<i>kW</i>	<i>163</i>	<i>170</i>	<i>170</i>	<i>163</i>	<i>170</i>	<i>177</i>	<i>182</i>	<i>195</i>	<i>204</i>	<i>212</i>
<b>Class H rise PR</b>	<b>163/27</b>	<b>kVA</b>	<b>211</b>	<b>220</b>	<b>220</b>	<b>211</b>	<b>220</b>	<b>230</b>	<b>237</b>	<b>253</b>	<b>264</b>	<b>275</b>
		<i>kW</i>	<i>169</i>	<i>176</i>	<i>176</i>	<i>169</i>	<i>176</i>	<i>184</i>	<i>189</i>	<i>202</i>	<i>211</i>	<i>220</i>
<b>Class F rise BR</b>	<b>105/40</b>	<b>kVA</b>	<b>175</b>	<b>182</b>	<b>182</b>	<b>175</b>	<b>182</b>	<b>190</b>	<b>196</b>	<b>209</b>	<b>218</b>	<b>228</b>
		<i>kW</i>	<i>140</i>	<i>146</i>	<i>146</i>	<i>140</i>	<i>146</i>	<i>152</i>	<i>157</i>	<i>167</i>	<i>175</i>	<i>182</i>

**EFFICIENCIES**

*Power factor 0.8*

110%	Class H BR	%	92.6	92.6	92.7	92.7	92.4	92.7	92.9	93.0	93.0	93.0
100%	Class H BR	%	93.0	93.0	93.1	93.0	92.8	93.0	93.2	93.3	93.4	93.4
75%	Class H BR	%	93.9	93.8	93.8	93.4	93.7	93.9	94.0	94.0	94.0	94.0
50%	Class H BR	%	94.3	94.2	94.0	93.2	94.2	94.2	94.3	94.3	94.2	94.1
25%	Class H BR	%	93.2	92.8	92.2	90.6	93.0	92.9	92.8	92.7	92.5	92.1

**CHARACTERISTIC PARAMETERS**

*Reactance base class H BR rating*

$K_c$	Short-circuit ratio		0.28	0.32	0.36	0.49	0.20	0.21	0.23	0.25	0.28	0.30
$X_d$	D-Axis synchronous reactance (unsaturated)	pu	4.06	3.82	3.55	3.03	5.08	4.79	4.56	4.36	4.16	3.98
$X'_d$	D-Axis transient reactance (saturated)	pu	0.20	0.19	0.18	0.15	0.25	0.24	0.22	0.22	0.21	0.20
$X''_d$	D-Axis sub-transient reactance (saturated)	pu	0.120	0.113	0.105	0.090	0.150	0.142	0.135	0.129	0.123	0.118
$X_q$	Q-Axis synchronous reactance (unsaturated)	pu	2.07	1.95	1.81	1.55	2.59	2.44	2.32	2.22	2.12	2.03
$X''_q$	Q-Axis sub-transient reactance (saturated)	pu	0.233	0.219	0.204	0.174	0.292	0.275	0.262	0.250	0.239	0.229
$X_2$	Negative-sequence reactance (saturated)	pu	0.177	0.166	0.154	0.132	0.221	0.209	0.198	0.190	0.181	0.173
$X_0$	Zero-sequence reactance (independent)	pu	0.008	0.008	0.007	0.006	0.010	0.010	0.009	0.009	0.008	0.008
$T'_d$	D-Axis transient time constant	ms		100						100		
$T''_d$	D-Axis sub-transient time constant	ms		10						10		
$T_{do}$	D-Axis open-circuit time constant	ms		2026						2026		
$T_a$	Armature time constant	ms		15						15		
$T_r$	Voltage recovery time	ms		< 500						< 500		

**EXCITATION VOLTAGE AND CURRENT**

No load excitation voltage	V	4.4	5.0	5.5	6.7	3.3	3.5	3.8	4.2	4.6	5.0
No load excitation current	A	0.56	0.64	0.70	0.85	0.42	0.45	0.48	0.53	0.58	0.63
Class H BR excitation voltage	V	22.6	23.7	24.2	24.8	20.5	20.7	20.9	21.8	22.6	23.6
Class H BR excitation current	A	2.87	3.01	3.07	3.15	2.60	2.63	2.65	2.77	2.87	3.00

**WINDING RESISTANCE**

*At 20°C*

Stator line-to-line (series star)	Ω	0.038	Exciter field - Shunt	Ω	7.9
Main field	Ω	4.04			

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

Manufactured for FG Wilson by Leroy Somer - Nidec.

**FRAME FGL30120 WINDING 6S**




**MODELS FGL30120**

REF: FGL30120W6S-1 SEP 2020


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**50 Hz SHUNT**

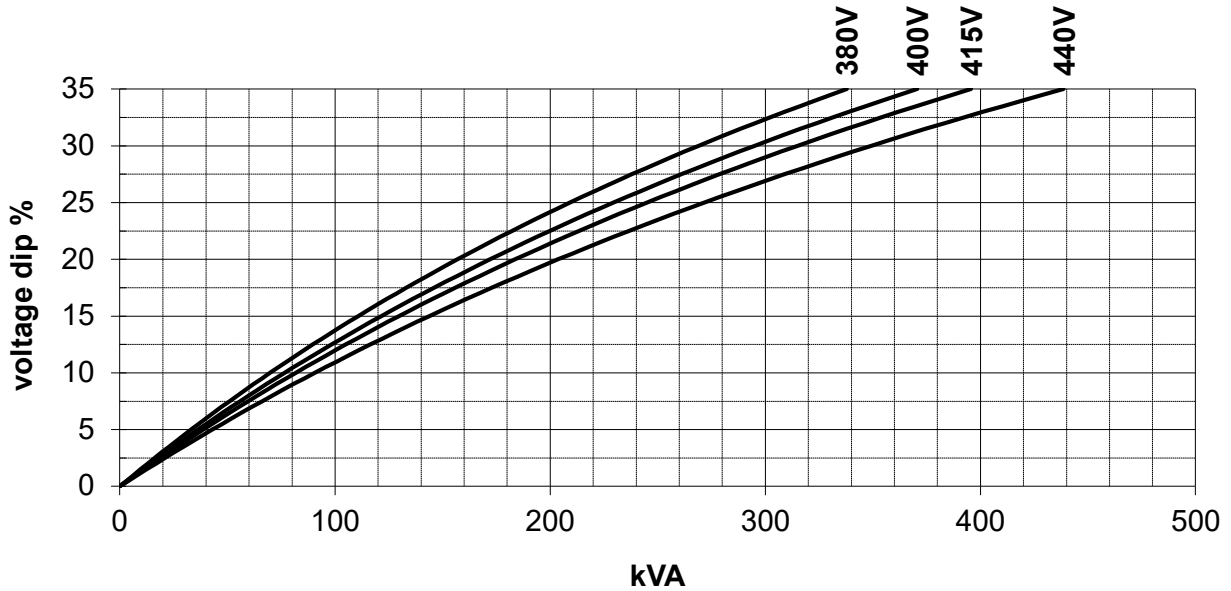

**60 Hz SHUNT**

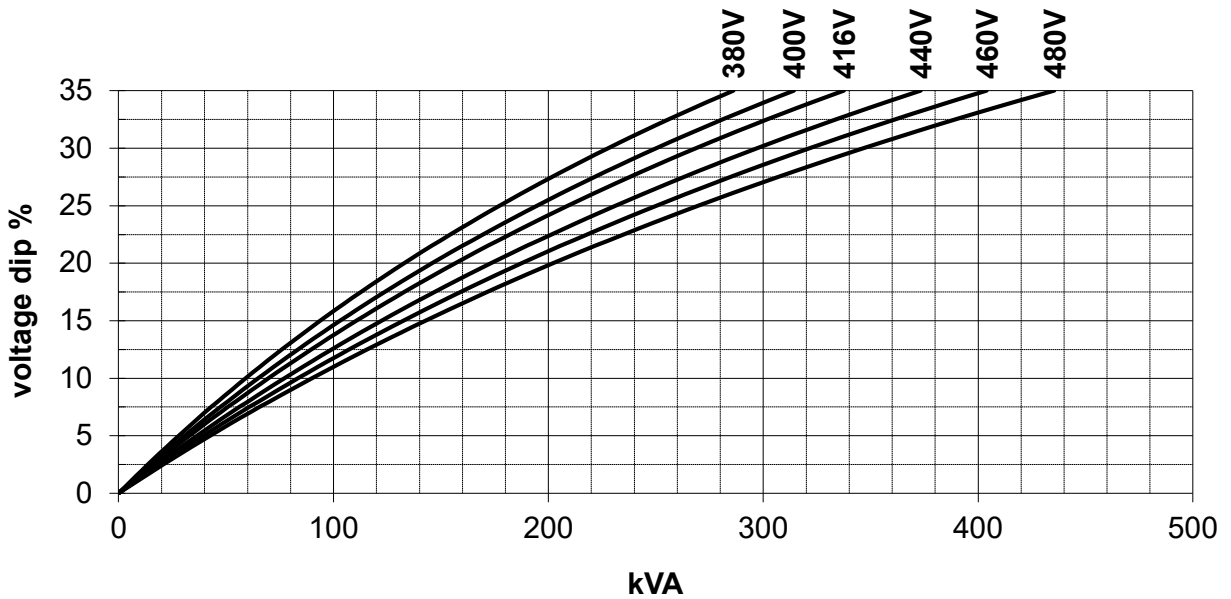

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.  
Manufactured for FG Wilson by Leroy Somer - Nidec.

**FRAME FGL30120 WINDING 6S**




**MODELS FGL30120**

REF: FGL30120W6S-1 SEP 2020


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**50 Hz PMG**

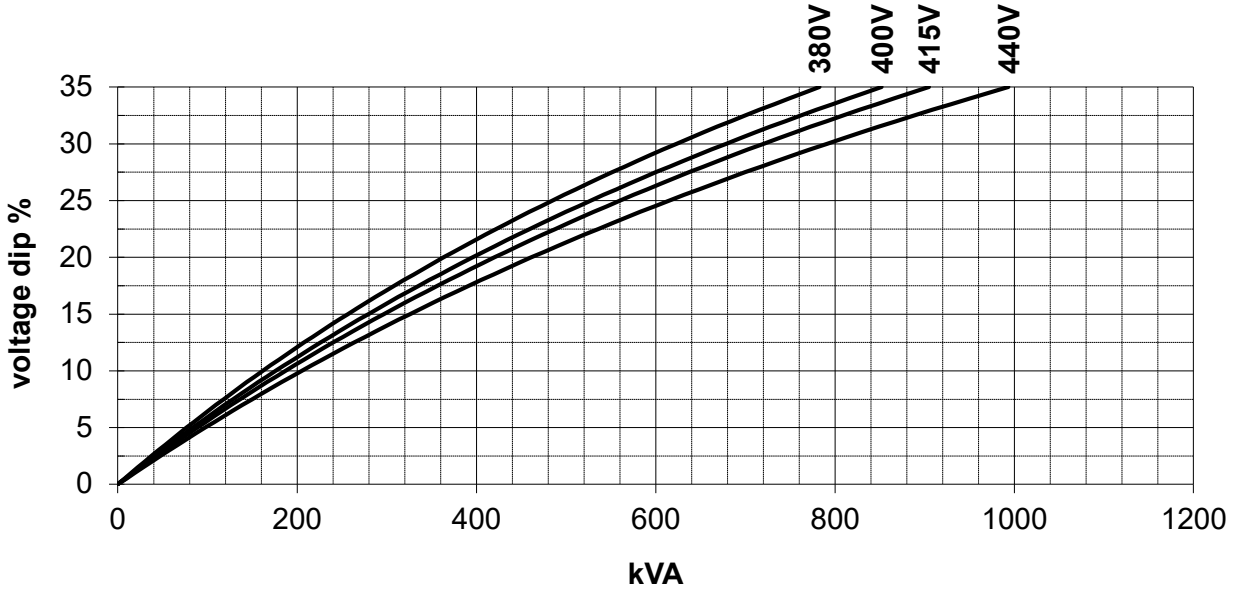

**60 Hz PMG**

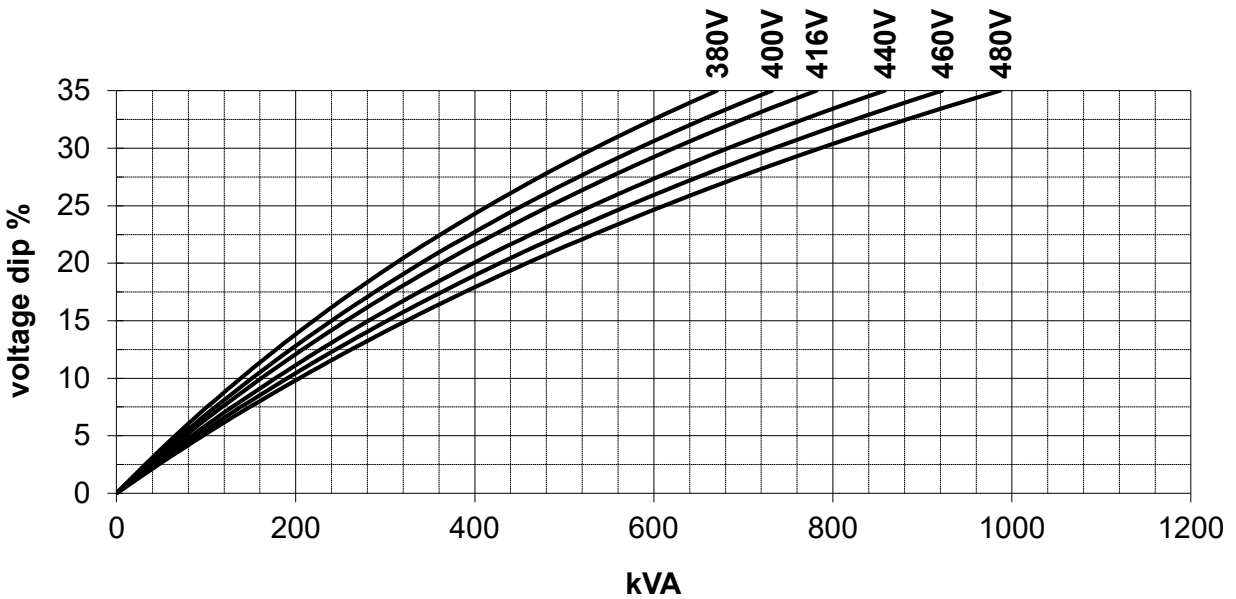

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.  
Manufactured for FG Wilson by Leroy Somer - Nidec.

**FRAME FGL30120 WINDING 6S**



**MODELS FGL30120**


REF: FGL30120W6S-1 SEP 2020

**THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES**

*No-load excitation at rated speed*

**400V 50Hz, 480V 60Hz**

*Series star*

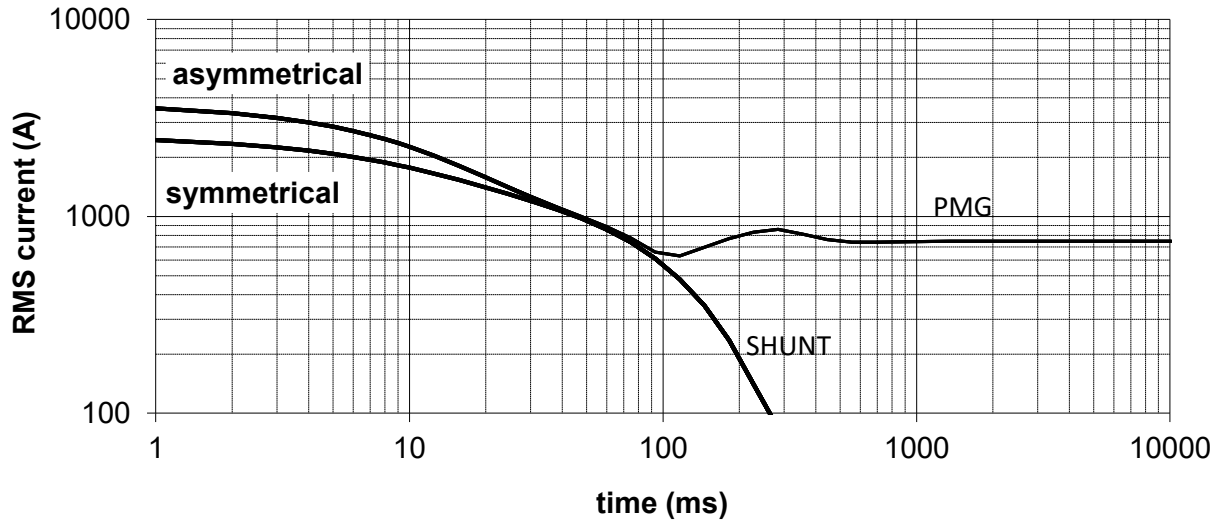

**Multiplication Factors**

<b>50Hz Voltages</b>	<b>380</b>	<b>400</b>	<b>415</b>	<b>440</b>
<b>Multiplication Factor</b>	0.95	1.00	1.04	1.10

*Apply factor up to 2xT'd, remainder of curve unchanged*

<b>60Hz Voltages</b>	<b>380</b>	<b>400</b>	<b>416</b>	<b>440</b>	<b>460</b>	<b>480</b>
<b>Multiplication Factor</b>	0.79	0.83	0.87	0.92	0.96	1.00

*Apply factor up to 2xT'd, remainder of curve unchanged*

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
 Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.  
 Manufactured for FG Wilson by Leroy Somer - Nidec.