

FRAME FGL30040**WINDING 6P****MODELS FGL30040**

REF: FGL30040W6P-1 SEP 2020

WINDING DETAILS

Code	6P	Insulation class	H
Phase	3	Leads	4
Pole number	4	Pitch	2/3

MECHANICAL DETAILS

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m ³ /s 0.25 / 0.3

EXCITATION DETAILS

Excitation system	SHUNT	PMG
AVR model	R120	R180
Sustained short-circuit current	-	270%:5s
Steady state voltage regulation	±1.0%	±1.0%

WAVEFORM

<i>Line voltage on no load</i>	
Total harmonic content THC	< 2%
Telephone influence factor TIF (NEMA)	< 50
Telephone harmonic factor THF (IEC)	< 2%

LINE VOLTAGE*No overvoltage tolerance for 220V 50Hz excitation level*

Frequency / speed	V	50Hz / 1500rpm			60Hz / 1800rpm					
		200	208	220	200	208	220	230	240	
Star										

RATING*Power factor 0.8, Altitude <=1000m*

Class H rise BR	125/40	kVA	105	105	95	112	119	120	126	131
		<i>kW</i>	84	84	76	89	95	96	101	105
Class H rise PR	150/40	kVA	111	111	100	118	127	128	134	139
		<i>kW</i>	89	89	80	95	101	102	107	111
Class H rise PR	163/27	kVA	116	116	104	123	131	132	139	144
		<i>kW</i>	92	92	83	98	105	106	111	115
Class F rise BR	105/40	kVA	96	96	86	102	109	110	115	119
		<i>kW</i>	76	76	69	81	87	88	92	95

EFFICIENCIES*Power factor 0.8*

110%	Class H BR	%	90.2	89.7	88.6	91.1	91.1	91.4	91.2	90.9
100%	Class H BR	%	90.6	90.2	88.9	91.5	91.5	91.7	91.6	91.3
75%	Class H BR	%	91.5	91.0	89.2	92.4	92.4	92.4	92.2	91.9
50%	Class H BR	%	91.7	90.9	88.2	92.6	92.6	92.4	92.1	91.6
25%	Class H BR	%	89.3	87.9	83.2	90.5	90.5	89.8	89.3	88.4

CHARACTERISTIC PARAMETERS*Reactance base class H BR rating*

K _c	Short-circuit ratio		0.44	0.54	0.88	0.24	0.26	0.31	0.36	0.42
X _d	D-Axis synchronous reactance (unsaturated)	pu	3.59	3.33	2.67	4.58	4.52	4.07	3.90	3.72
X' _d	D-Axis transient reactance (saturated)	pu	0.16	0.14	0.12	0.20	0.20	0.18	0.17	0.16
X'' _d	D-Axis sub-transient reactance (saturated)	pu	0.093	0.087	0.069	0.119	0.117	0.106	0.101	0.097
X _q	Q-Axis synchronous reactance (unsaturated)	pu	1.83	1.70	1.36	2.33	2.31	2.08	1.99	1.90
X'' _q	Q-Axis sub-transient reactance (saturated)	pu	0.199	0.185	0.148	0.254	0.251	0.226	0.217	0.207
X ₂	Negative-sequence reactance (saturated)	pu	0.146	0.136	0.109	0.187	0.184	0.166	0.159	0.152
X ₀	Zero-sequence reactance (independent)	pu	0.006	0.006	0.005	0.008	0.008	0.007	0.007	0.007
T' _d	D-Axis transient time constant	ms	100			100				
T'' _d	D-Axis sub-transient time constant	ms	10			10				
T' _{do}	D-Axis open-circuit time constant	ms	2309			2309				
T _a	Armature time constant	ms	15			15				
T _r	Voltage recovery time	ms	< 500			< 500				

EXCITATION VOLTAGE AND CURRENT

No load excitation voltage	V	9.3	11.0	15.1	5.5	6.1	6.9	7.9	9.2
No load excitation current	A	0.80	0.94	1.30	0.47	0.52	0.59	0.68	0.79
Class H BR excitation voltage	V	38.0	41.4	46.6	29.4	31.0	31.3	33.7	36.8
Class H BR excitation current	A	3.26	3.55	4.00	2.52	2.66	2.69	2.89	3.16

WINDING RESISTANCE*At 20°C*

Stator line-to-line (series star)	Ω	0.101	Exciter field - Shunt		Ω	11.7
Main field	Ω	2.35				

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL30040 WINDING 6P




MODELS FGL30040

REF: FGL30040W6P-1 SEP 2020


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz SHUNT

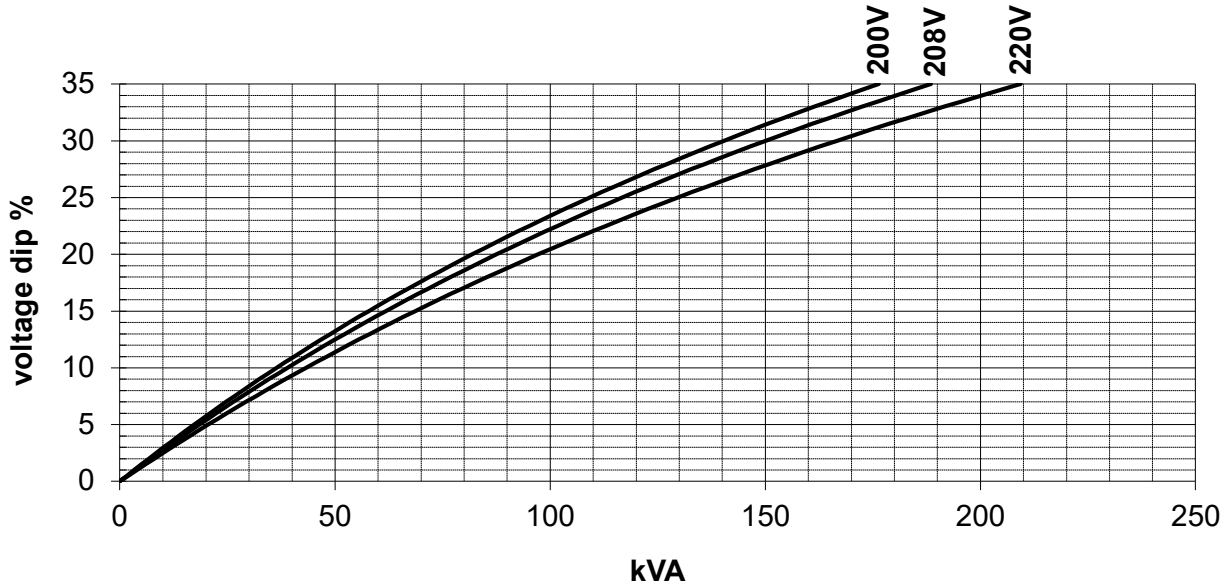

60 Hz SHUNT

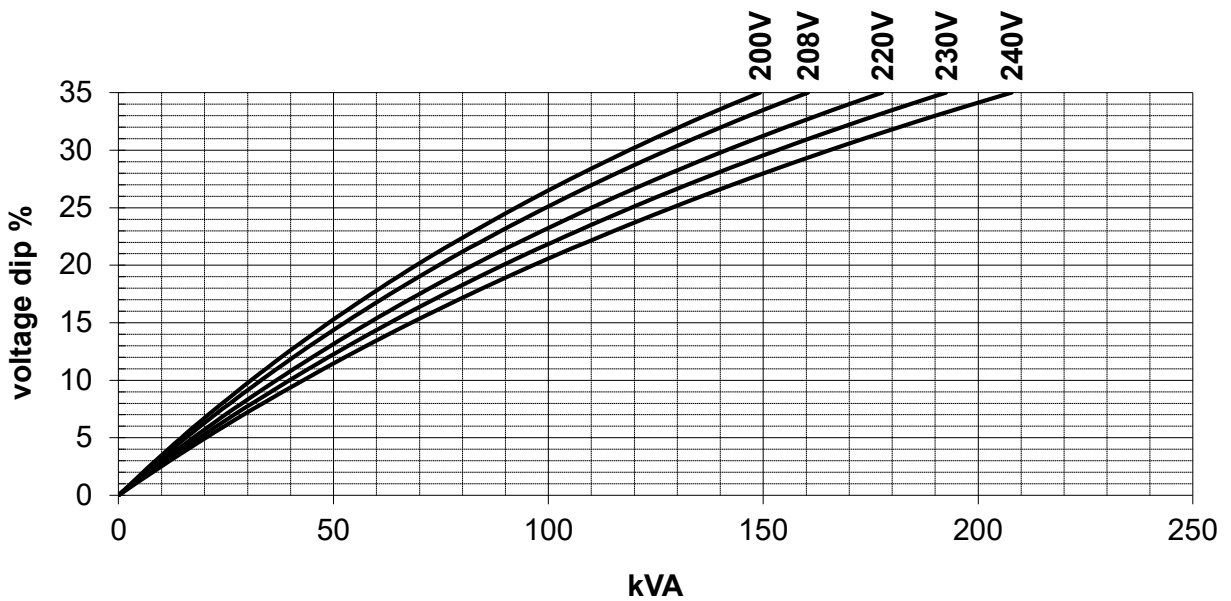

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
Manufactured for FG Wilson by Leroy Somer - Nidec.

FRAME FGL30040 WINDING 6P




MODELS FGL30040

REF: FGL30040W6P-1 SEP 2020


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz PMG

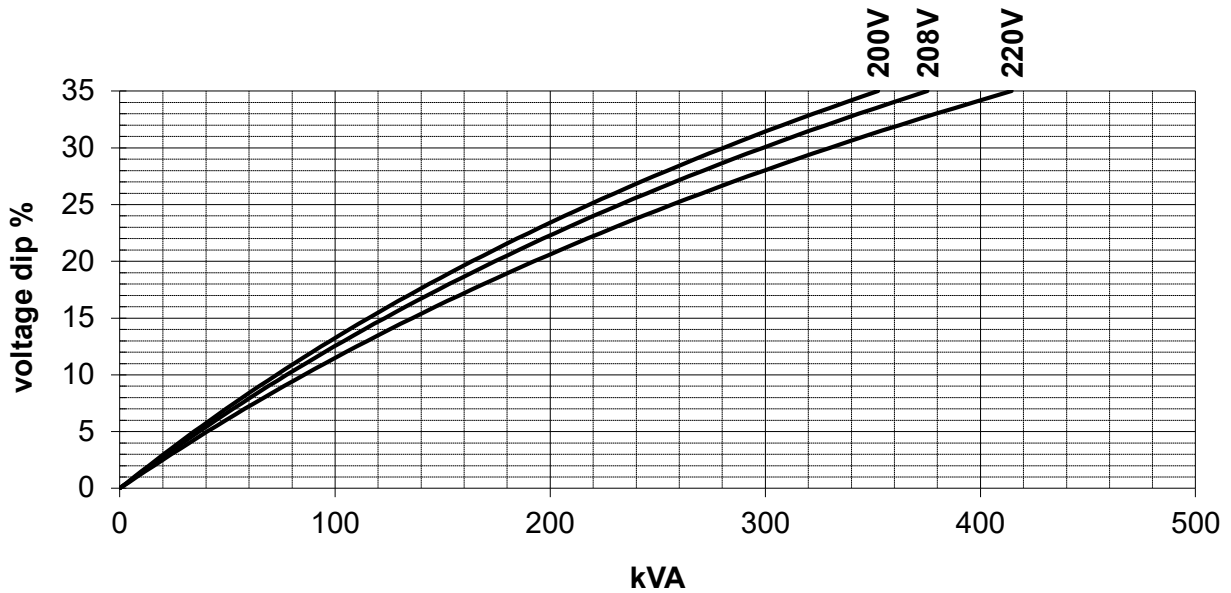

60 Hz PMG

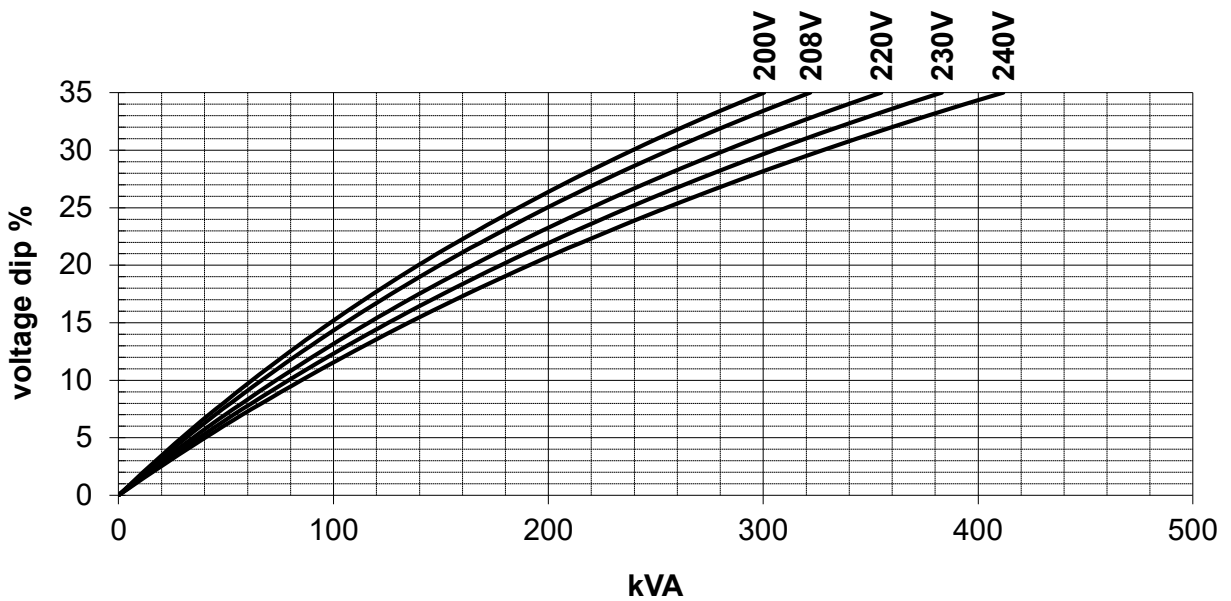

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.
Manufactured for FG Wilson by Leroy Somer - Nidec.




THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES

No-load excitation at rated speed

200V 50Hz, 240V 60Hz

Star

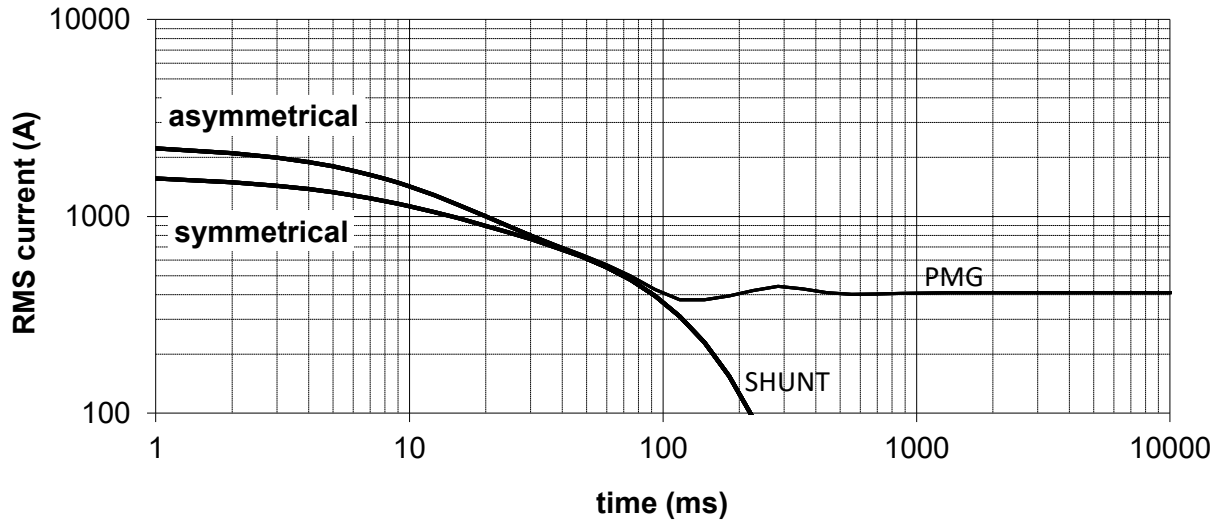

Multiplication Factors

50Hz Voltages

	200	208	220
Multiplication Factor	1.00	1.04	1.10

Apply factor up to 2xT'd, remainder of curve unchanged

60Hz Voltages

	200	208	220	230	240
Multiplication Factor	0.83	0.87	0.92	0.96	1.00

Apply factor up to 2xT'd, remainder of curve unchanged