

**FRAME FGL30080****WINDING 6P****MODELS FGL30080**

REF: FGL30080W6P-1 SEP 2020

**WINDING DETAILS**

Code	6P	Insulation class	H
Phase	3	Leads	4
Pole number	4	Pitch	2/3

**MECHANICAL DETAILS**

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m <sup>3</sup> /s 0.25 / 0.3

**EXCITATION DETAILS**

Excitation system	<b>SHUNT</b>	<b>PMG</b>
AVR model	R120	R180
Sustained short-circuit current	-	270%:5s
Steady state voltage regulation	±1.0%	±1.0%

**WAVEFORM**

<i>Line voltage on no load</i>	
Total harmonic content THC	< 2%
Telephone influence factor TIF (NEMA)	< 50
Telephone harmonic factor THF (IEC)	< 2%

**LINE VOLTAGE***No overvoltage tolerance for 220V 50Hz excitation level*

Frequency / speed	V	50Hz / 1500rpm			60Hz / 1800rpm					
		200	208	220	200	208	220	230	240	
Star										

**RATING***Power factor 0.8, Altitude <=1000m*

<b>Class H rise BR</b>	<b>125/40</b>	<b>kVA</b>	<b>137</b>	<b>137</b>	<b>125</b>	<b>145</b>	<b>150</b>	<b>160</b>	<b>169</b>	<b>169</b>
		<i>kW</i>	110	110	100	116	120	128	135	135
<b>Class H rise PR</b>	<b>150/40</b>	<b>kVA</b>	<b>145</b>	<b>145</b>	<b>133</b>	<b>154</b>	<b>159</b>	<b>170</b>	<b>179</b>	<b>179</b>
		<i>kW</i>	116	116	106	123	127	136	143	143
<b>Class H rise PR</b>	<b>163/27</b>	<b>kVA</b>	<b>151</b>	<b>151</b>	<b>138</b>	<b>160</b>	<b>165</b>	<b>176</b>	<b>186</b>	<b>186</b>
		<i>kW</i>	121	121	110	128	132	141	149	149
<b>Class F rise BR</b>	<b>105/40</b>	<b>kVA</b>	<b>125</b>	<b>125</b>	<b>114</b>	<b>132</b>	<b>137</b>	<b>146</b>	<b>154</b>	<b>154</b>
		<i>kW</i>	100	100	91	106	109	116	123	123

**EFFICIENCIES***Power factor 0.8*

110%	Class H BR	%	91.6	91.5	91.0	92.2	92.3	92.4	92.3	92.3
100%	Class H BR	%	92.1	91.9	91.3	92.5	92.7	92.7	92.6	92.6
75%	Class H BR	%	92.8	92.6	91.6	93.3	93.4	93.4	93.3	93.1
50%	Class H BR	%	93.1	92.6	91.0	93.5	93.5	93.5	93.3	92.9
25%	Class H BR	%	91.1	90.2	87.1	91.7	91.6	91.4	91.1	90.3

**CHARACTERISTIC PARAMETERS***Reactance base class H BR rating*

K <sub>c</sub>	Short-circuit ratio		0.38	0.45	0.68	0.23	0.25	0.28	0.31	0.37
X <sub>d</sub>	D-Axis synchronous reactance (unsaturated)	pu	3.67	3.41	2.77	4.66	4.46	4.25	4.11	3.77
X' <sub>d</sub>	D-Axis transient reactance (saturated)	pu	0.17	0.16	0.13	0.22	0.21	0.20	0.19	0.18
X'' <sub>d</sub>	D-Axis sub-transient reactance (saturated)	pu	0.102	0.095	0.077	0.130	0.124	0.118	0.114	0.105
X <sub>q</sub>	Q-Axis synchronous reactance (unsaturated)	pu	1.87	1.74	1.41	2.38	2.27	2.17	2.10	1.92
X'' <sub>q</sub>	Q-Axis sub-transient reactance (saturated)	pu	0.207	0.193	0.156	0.263	0.252	0.240	0.232	0.213
X <sub>2</sub>	Negative-sequence reactance (saturated)	pu	0.155	0.144	0.117	0.197	0.188	0.179	0.173	0.159
X <sub>0</sub>	Zero-sequence reactance (independent)	pu	0.007	0.006	0.005	0.009	0.008	0.008	0.008	0.007
T' <sub>d</sub>	D-Axis transient time constant	ms	100			100				
T'' <sub>d</sub>	D-Axis sub-transient time constant	ms	10			10				
T' <sub>do</sub>	D-Axis open-circuit time constant	ms	2155			2155				
T <sub>a</sub>	Armature time constant	ms	15			15				
T <sub>r</sub>	Voltage recovery time	ms	< 500			< 500				

**EXCITATION VOLTAGE AND CURRENT**

No load excitation voltage	V	8.7	10.0	12.9	5.7	6.1	6.9	7.6	8.7
No load excitation current	A	0.67	0.77	1.00	0.44	0.47	0.53	0.59	0.67
Class H BR excitation voltage	V	36.6	38.4	40.4	30.8	31.3	33.0	35.2	36.1
Class H BR excitation current	A	2.83	2.97	3.12	2.38	2.42	2.55	2.72	2.79

**WINDING RESISTANCE***At 20°C*

Stator line-to-line (series star)	Ω	0.068	Exciter field - Shunt		Ω	12.9
Main field	Ω	2.89				

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

Manufactured for FG Wilson by Leroy Somer - Nidec.

**FRAME FGL30080 WINDING 6P**




**MODELS FGL30080**

REF: FGL30080W6P-1 SEP 2020


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**50 Hz SHUNT**

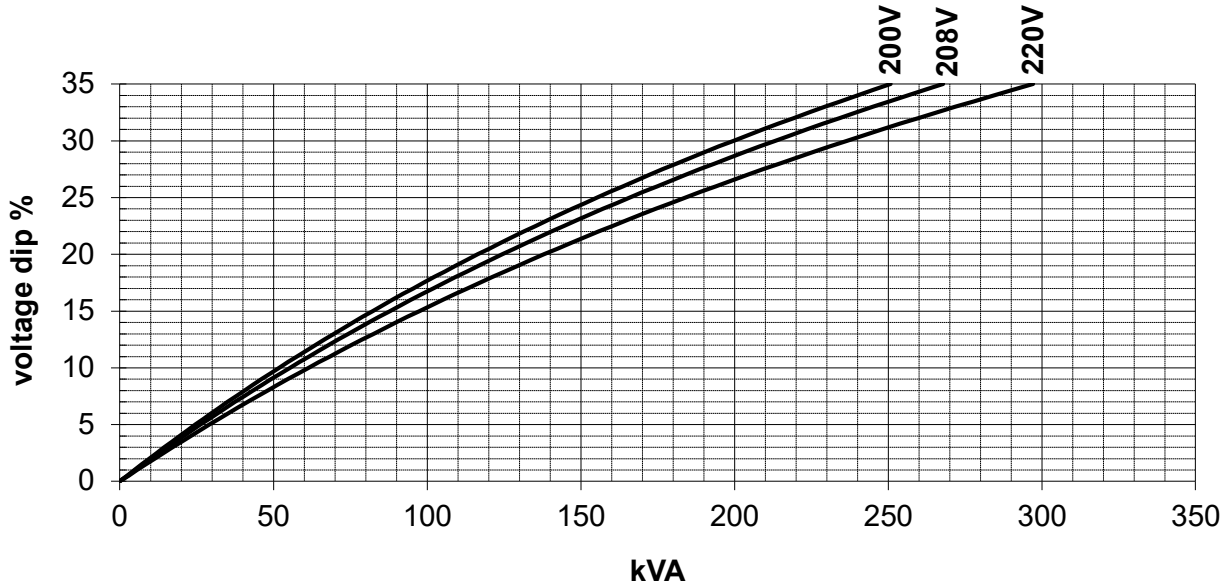

**60 Hz SHUNT**

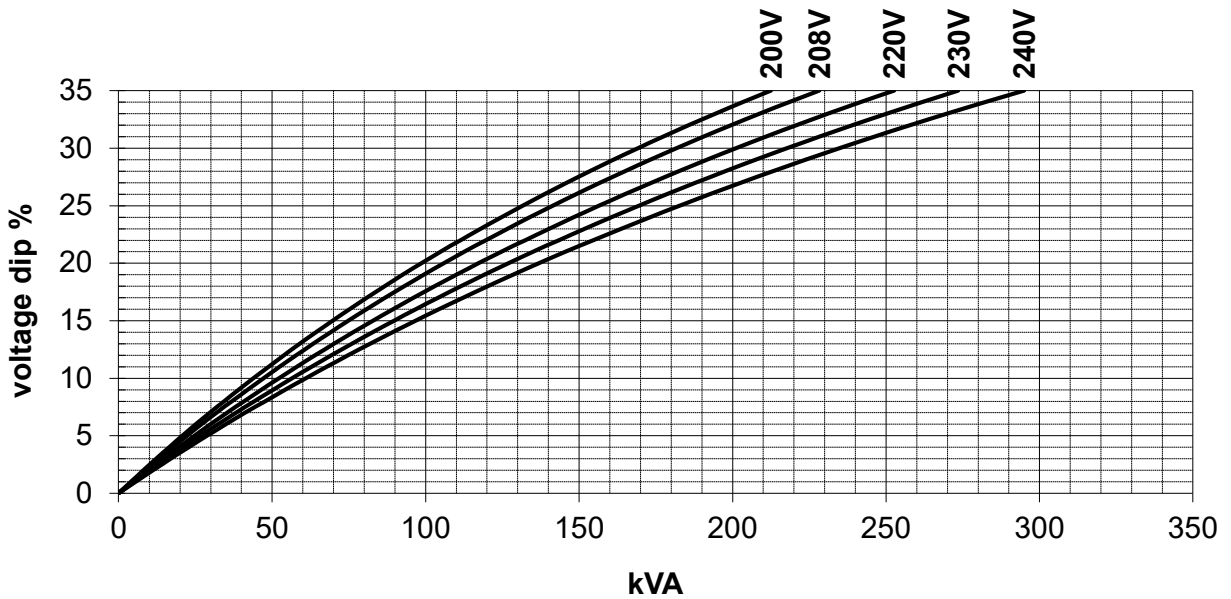

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.  
Manufactured for FG Wilson by Leroy Somer - Nidec.

**FRAME FGL30080 WINDING 6P**




**MODELS FGL30080**

REF: FGL30080W6P-1 SEP 2020


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**50 Hz PMG**

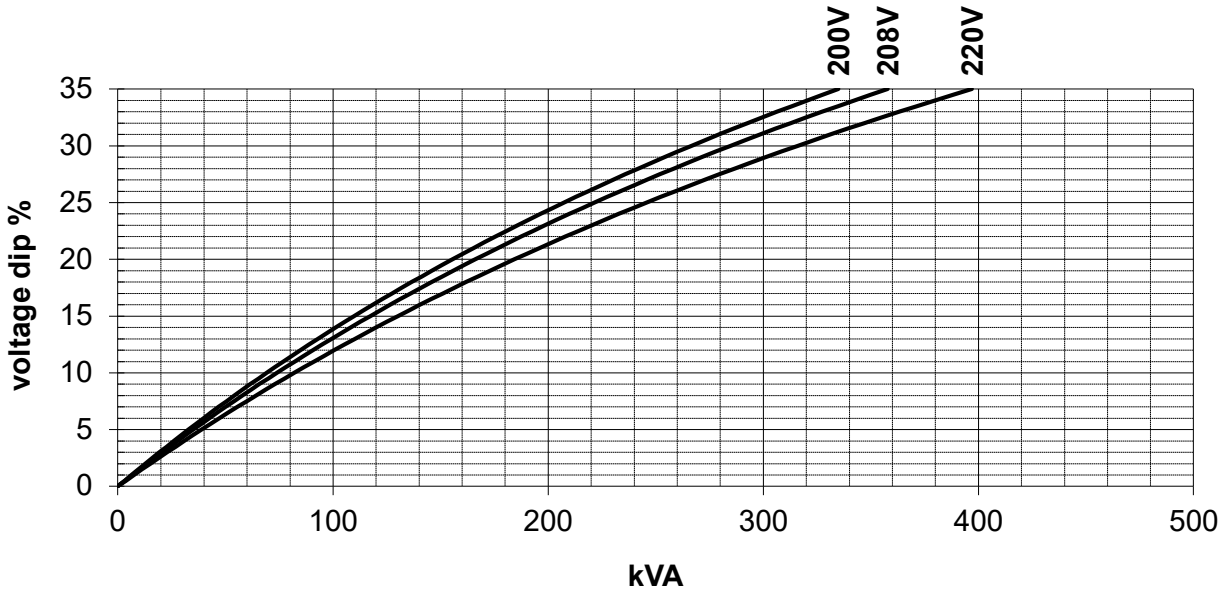

**60 Hz PMG**

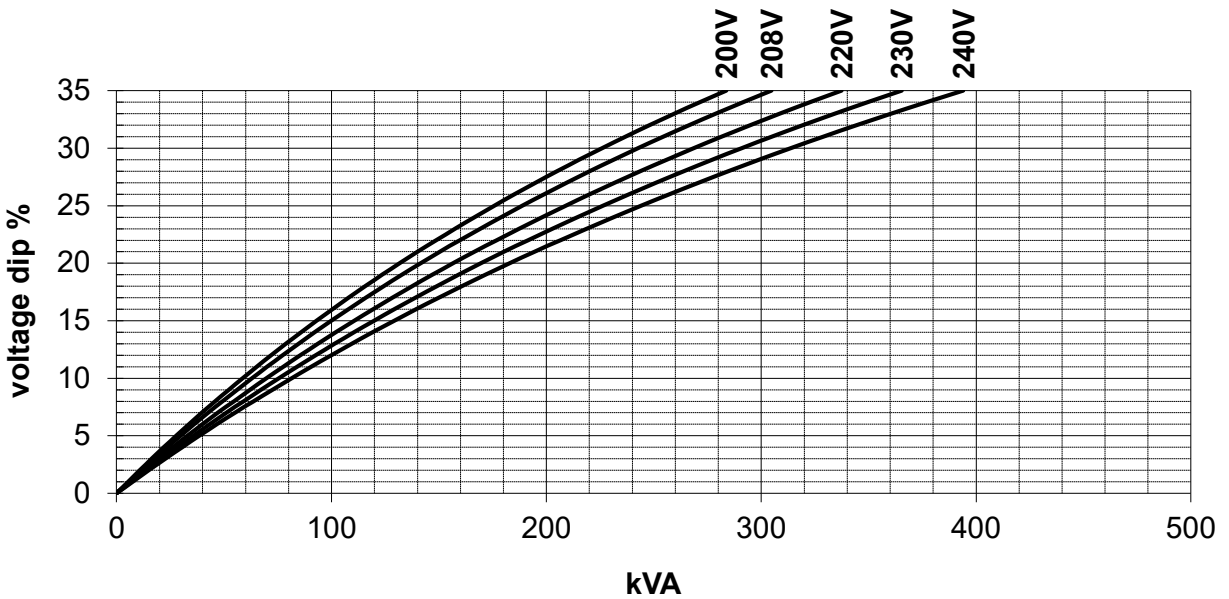

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.  
Manufactured for FG Wilson by Leroy Somer - Nidec.

**FRAME FGL30080 WINDING 6P**



**MODELS FGL30080**


REF: FGL30080W6P-1 SEP 2020

**THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES**

*No-load excitation at rated speed*

**200V 50Hz, 240V 60Hz**

*Star*

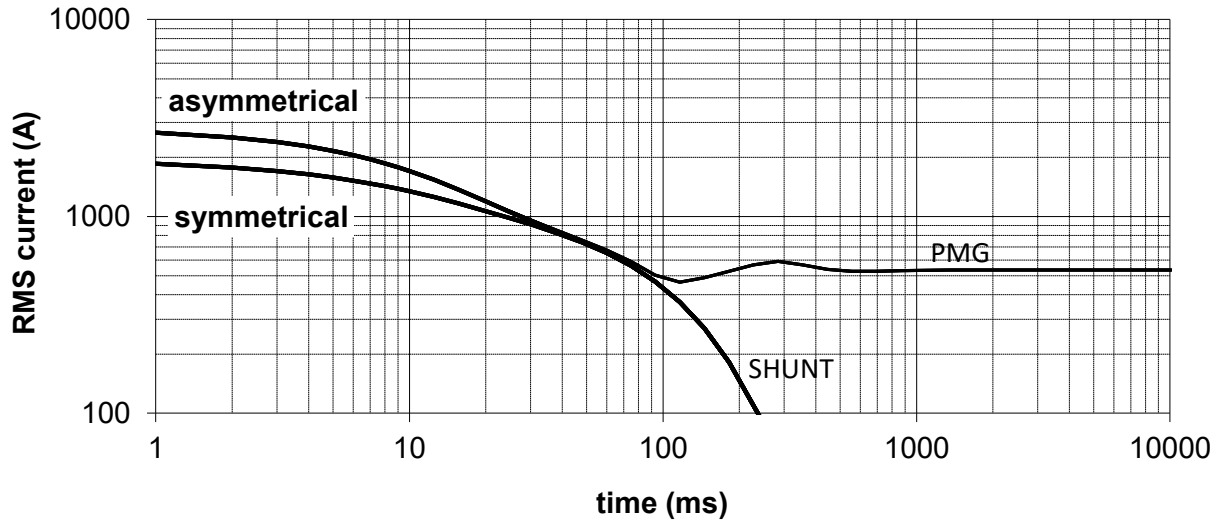

**Multiplication Factors**

**50Hz Voltages**

	<b>200</b>	<b>208</b>	<b>220</b>
<b>Multiplication Factor</b>	1.00	1.04	1.10

*Apply factor up to 2xT'd, remainder of curve unchanged*

**60Hz Voltages**

	<b>200</b>	<b>208</b>	<b>220</b>	<b>230</b>	<b>240</b>
<b>Multiplication Factor</b>	0.83	0.87	0.92	0.96	1.00

*Apply factor up to 2xT'd, remainder of curve unchanged*