




CURVE SHOWS APPROXIMATE PERFORMANCE FOR CLEAR WATER (ANSI/HI 1.6-2000 Centrifugal Pump Test Standard unless otherwise specified). For media other than water, corrections must be made for density, viscosity and/or other effects of solids. WEIR MINERALS reserves the right to change pump performance and/or delete impellers without notice. Frame suitability must be checked for each duty and drive arrangement. Not all frame alternatives are necessarily available from each manufacturing centre.

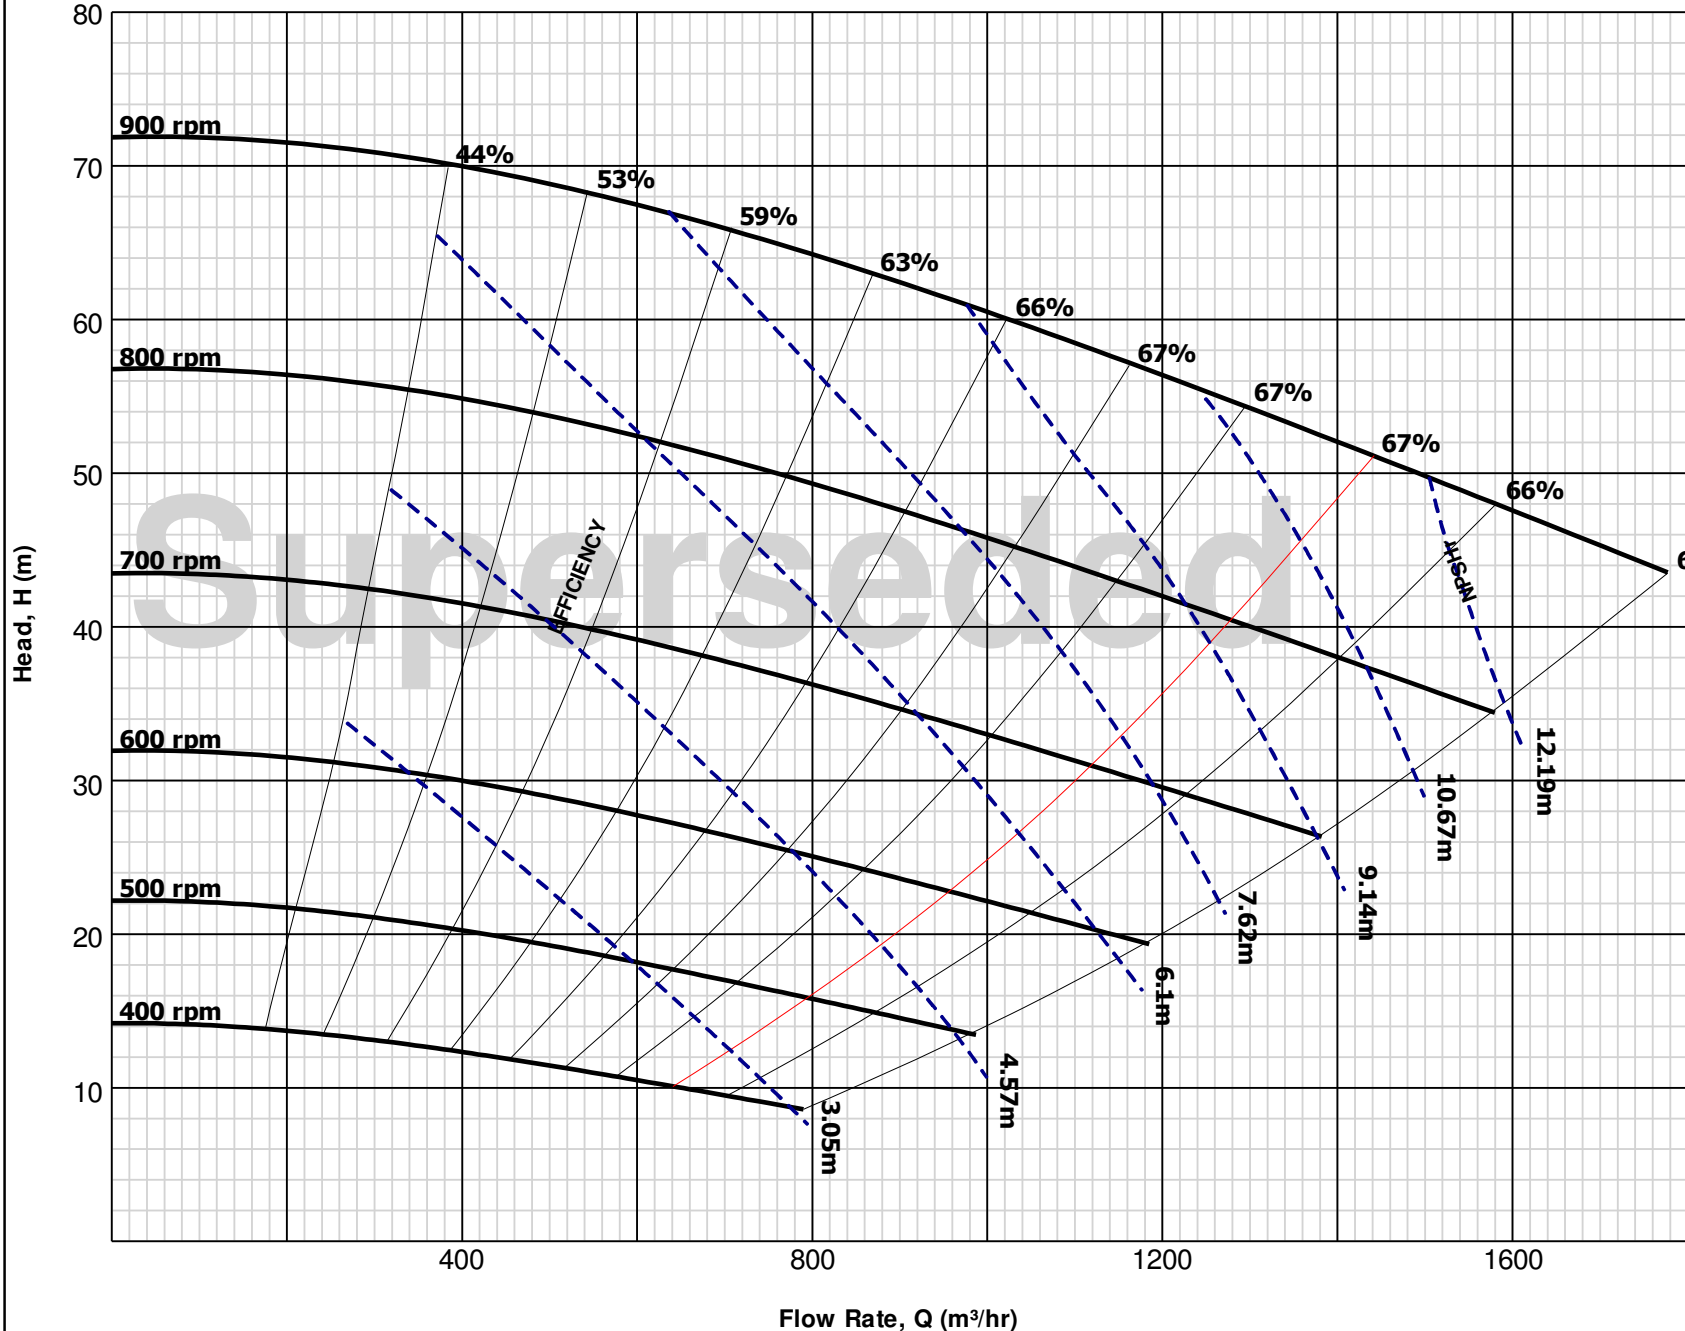

Pump

Discharge	203mm
Suction	254mm

Impeller

Vanes	4
Vane ø	690.88mm
Type	Closed
Part No	Material
IMPC43401	Metal

Seal

Centrifugal Sealed Pump

Liner (Norm Max r/min)

Unlined	900
---------	-----

Min Passage Size

76.2mm

Curve

Revision	3
Revision Notes	c
Reference	C4-3402
Last Issued	Oct 94
Issued	Oct 94

© 1/2014 Weir Minerals North America
All Rights Reserved