

High head 'H' pump builds

Our 'H Pumps' offer maximum performance and efficiency for high head, high pressure dewatering.

These efficient models offer total heads up to 158m, mechanical shaft sealing, Selprime® automatic self-priming and emission compliant engines. Ideal for high head and high pressure applications, they're simple to operate and maintain.

Our H Pumps are perfect for

- S** High head dewatering
- S** Pipeline testing & cleaning
- S** Water boosting



Standard builds	Super Silent		Electric -Skid*	
	Metric	US	Metric	US
Length	368 cm	145 in	255 cm	100 in
Width	163 cm	64 in	145 cm	57 in
Height	260 cm	102 in	173 cm	68 in
Dry Weight	3900 kg	8598 lb	1975 kg	4354 lb
Gross Weight	3900 kg	8598 lb	1975 kg	4354 lb
Sound Power	103 LWA		103 LWA	
Sound Pressure @ 1m (3ft)	81 db(A)		81 db(A)	
Sound Pressure @ 7m (23ft)	73 db(A)		73 db(A)	
Pump SAE Size	long coupled		long coupled	
Motor	CAT 7.1 T4		90 kW 400/3/50	120 hp
Emission Rating	EU Stage IV EPA Tier 4 Final		-	
Engine / Motor Max Speed	1800 rpm		1800 rpm	
Fuel Tank Capacity.**	No fuel tank	No fuel tank	-	-
BEP - Fuel Consumption	30 lt/hr	6.6 US gal/hr	-	-


*Open sets exclude fittings

** Fuel tank capacity can be increased with the addition of an auxiliary fuel tank.

Installation drawings are available upon request.

Optional extras

- | | |
|--------------------------------|----------------------------------|
| Training | Pump telemetry |
| Genuine parts | Oil drain kit |
| Valves / Fittings | Hose / pipework |
| Pump accessories | DOL panels |
| Tanks & filtration | Soft Start panels |
| Pipe stoppers | Variable speed drive panels |
| Auto stop/start control panels | Ultra-sonic level control panels |

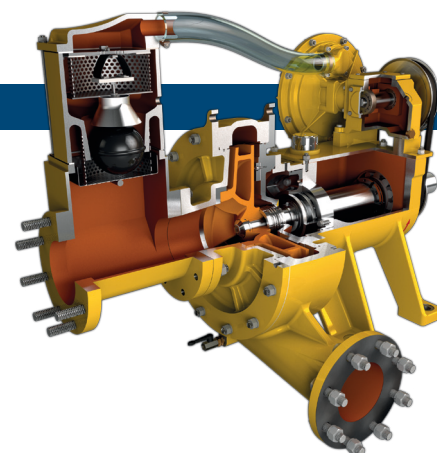

SELWOOD
www.selwood.co.uk

Bournemouth Road
Chandler's Ford, Eastleigh
Hampshire
SO53 3ZL UK

T +44(0) 23 8026 6311
E info@selwood.co.uk