



P1375-1 Data Centre Continuous


Output Ratings

Voltage, Frequency		DCC	Overload
400/230 V, 50 Hz	kVA	1250	1375
	kW	1000	1100



0.8 Power factor

Please refer to the output ratings technical data section for specific generator set outputs per voltage.

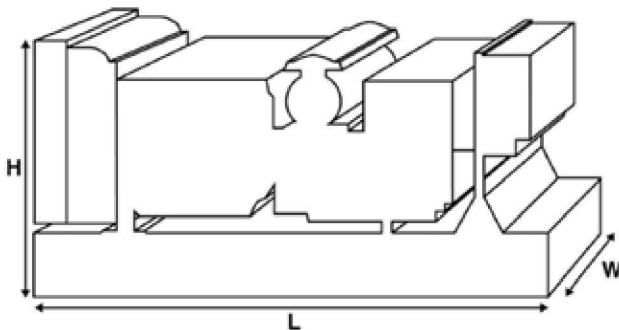

Dimensions and Weights

Length	mm	4788 (188.5)
Width	mm	1895 (74.6)
Height	mm	2440 (96.1)
Weight (Dry)	kg	8884 (19586)
Weight (Wet)	kg	9080 (20018)

Ratings in accordance with ISO 8528, ISO 3046, IEC 60034, BS5000 and NEMA MG-1.22.

Generator set pictured may include optional accessories.

Data Centre Continuous (DCC) Rating

These ratings are applicable for supplying continuous electrical power (with no restrictions on average variable load factor up to 100% constant load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

FG Wilson offer a range of optional features to allow you to tailor our generator sets to meet your power needs.

Options available include:

- Upgrade to CE Certification
- A wide range of Sound Attenuated Enclosures
- A variety of generator set control and synchronising panels
- Additional alarms and shutdowns
- A selection of exhaust silencer noise levels

For further information on all of the standard and optional features accompanying this product please contact your local Dealer or visit:

www.fgwilson.com

P1375-1 Data Centre Continuous



Ratings and Performance Data

Engine Make		Perkins	
Engine Model:		4012-46TWG2A	
Alternator Make		Leroy Somer	
Alternator Model:		LL8224H	
Control Panel:		DSE7410	
Base Frame:		Heavy Duty Fabricated Steel	
Circuit Breaker Type:		Options Available	
Frequency:		50 HZ	60 HZ
Engine Speed: RPM	rpm	1500	1800
Fuel Tank Capacity:	litres (US gal)	N/A (N/A)	
Fuel Consumption DCC	litres (US gal)/hr	258 (68.2)	
Fuel Consumption Overload	litres (US gal)/hr	284.9 (75.3)	

Engine Technical Data

No. of Cylinders		12
Alignment		VEE
Cycle		4 STROKE
Bore	mm (in)	160 (6.3)
Stroke	mm (in)	190 (7.5)
Induction		TURBOCHARGED
Cooling Method		WATER
Governing Type		ELECTRONIC
Governing Class		ISO 8528
Compression Ratio		13.0:1
Displacement	L (cu. in)	45.8 (2797.5)
Moment of Inertia:	kg m² (lb/in²)	19.3 (65951)
Voltage		24
Ground		Negative
Battery Charger Amps		40
Engine Weight Dry	kg (lb)	4440 (9788)
Engine Weight Wet	kg (lb)	4604 (10150)

Engine Performance Data

		50 Hz	60 Hz
Engine Speed	rpm	1500	1800
Gross Engine Power DCC	kW (hp)	1108 (1486)	1113 (1493)
Gross Engine Power Overload	kW (hp)	1219 (1635)	1224 (1641)
BMEP Prime	kPa (psi)	1933 (280.4)	1619 (234.8)
BMEP Standby	kPa (psi)	2127 (308.5)	1780 (258.2)

P1375-1 Data Centre Continuous



Fuel System

Fuel Filter Type:	Replaceable Element				
Recommended Fuel:		Class A2 Diesel			
Fuel Consumption at		110 % Load	100 % Load	75 % Load	50 % Load
50 Hz DCC	l/hr (US gal/hr)	284.9 (75.3)	258 (68.2)	197 (52)	145 (38.3)

(Based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, class A2)

Air System

		50 Hz	60 Hz
Air Filter Type:		Replaceable Element	
Combustion Air Flow DCC	m ³ /min (cfm)	102 (3602)	109 (3849)
Combustion Air Flow Overload	m ³ /min (cfm)	109 (3849)	114 (4026)
Max. Combustion Air Intake Restriction	kPa	4 (16.1)	

Cooling System

		50 Hz	60 Hz
Cooling System Capacity	l (US gal)	208 (54.9)	196 (51.8)
Water Pump Type:		Centrifugal	
Heat Rejected to Water & Lube Oil: DCC	kW (Btu/min)	372 (21155)	387 (22008)
Heat Rejected to Water & Lube Oil: Overload	kW (Btu/min)	401 (22804)	450 (25591)
Heat Radiation to Room*: DCC	kW (Btu/min)	140.3 (7979)	133 (7564)
Heat Radiation to Room*: Overload	kW (Btu/min)	154.3 (8775)	147 (5175)
Radiator Fan Load:	kW (hp)	38 (51)	51 (68.4)
Radiator Cooling Airflow:	m ³ /min (cfm)	1350 (47675)	1770 (62507)
External Restriction to Cooling Airflow:	Pa (in H ₂ O)	250 (1)	250 (1)

*: Heat radiated from engine and alternator

Designed to operate in ambient conditions up to 50°C (122°F).

Contact your local FG Wilson Dealer for power ratings at specific site conditions.

Lubrication System

Oil Filter Type:	Spin-On, Full Flow	
Total Oil Capacity:	l (US gal)	177 (46.8)
Oil Pan Capacity:	l (US gal)	159 (42)
Oil Type:	API CH4 15W-40	
Oil Cooling Method:	WATER	

Exhaust System

		50 Hz	60 Hz
Maximum Allowable Back Pressure:	kPa (in Hg)	5 (1.5)	
Exhaust Gas Flow: DCC	m ³ /min (cfm)	230 (8122)	235 (8299)
Exhaust Gas Flow: Overload	m ³ /min (cfm)	230 (8122)	235 (8299)
Exhaust Gas Temperature: DCC	°C (°F)	422 (792)	430 (806)
Exhaust Gas Temperature: Overload	°C (°F)	422 (792)	430 (806)

P1375-1 Data Centre Continuous



Alternator Physical Data

No. of Bearings:	1
Insulation Class:	H
Winding Pitch:	2/3
Winding Code	6S
Wires:	6
Ingress Protection Rating:	IP23
Excitation System:	AREP
AVR Model:	R450M/D350

* dependant on voltage code selected

Alternator Operating Data

Overspeed: rpm	2250
Voltage Regulation: (Steady state) %	+/- 0.5
Wave Form NEMA = TIF:	50
Wave Form IEC = THF: %	2
Total Harmonic content LL/LN: %	3.5
Radio Interference:	EN61000-6
Radiant Heat: 50 Hz kW (Btu/min)	65.3 (3714)
Radiant Heat: 60 Hz kW (Btu/min)	57 (3242)

Alternator Performance Data 50 Hz:

		415/240 V	400/230 V	380/220 V	
Voltage Code					
Motor Starting Capability*	kVA	3093	2883	2613	
Short Circuit Capacity**	%	300	300	300	300
Reactances	Xd	3.564	3.836	4.25	
	X'd	0.173	0.186	0.206	
	X''d	0.148	0.148	0.164	

Alternator Performance Data 60 Hz

		480/277 V	380/220 V		440/254 V
Voltage Code					
Motor Starting Capability*	kVA	3430	2192		2906
Short Circuit Capacity**	%	300	300	300	300
Reactances	Xd	3.196	5.1		3.804
	X'd	0.155	0.247		0.184
	X''d	0.124	0.197		0.147

Reactances shown are applicable to prime ratings.

*Based on 30% voltage dip at 0.4 power factor.

** With optional independant excitation system (PMG / AUX winding)

P1375-1 Data Centre Continuous



Output Ratings 50 Hz				
Voltage Code	DCC		Overload	
	kVA	kW	kVA	kW
415/240V	1250	1000	1375	1100
400/230V	1250	1000	1375	1100
380/220V	1250	1000	1375	1100
230/115V				
220/127V				
220/110V				
200/115V				
240V				
230V				
220V				



P1375-1 DCC

Dealer Contact Details



☎ 01953 454540

✉ enquiries@stuartgroup.co.uk

🌐 www.stuartgroup.co.uk

Stuart House, Hargham Road, Shropham, Norfolk, NR17 1DT

Documentation

● Operation and maintenance manual including circuit wiring diagrams.

Generator Set Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

Warranty

6.8 – 750 kVA electric power generation products in DCC applications the warranty period is 12 months from date of start-up, unlimited hours (8760) or 24 months

from date of start-up, limited to 500 hours per year.

730 – 2500 kVA electric power generation products in DCC applications the warranty period is 12 months from date of start-up, unlimited hours (8760)

FG Wilson manufactures product in the following locations:

• Brazil • China • India

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network.

To contact your local Sales Office please visit the FG Wilson website at www.fgwilson.com.

FG Wilson is a trading name of Caterpillar (NI) Limited.

In line with our policy of continuous product development, we reserve the right to change specification without notice.