

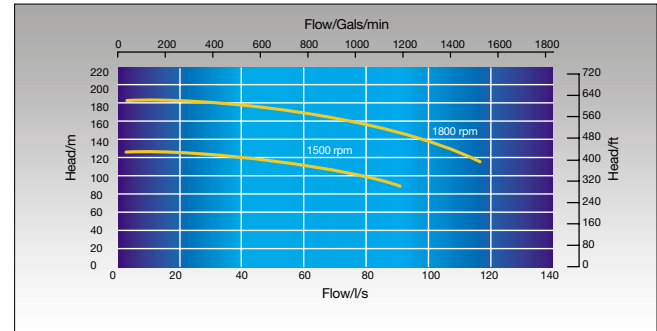




Accessories	Part Number	
Pump Fittings Intake Fitting Flange to Bauer	(SY/H) 3194353	
Pump Fitting Gasket	On application	
Delivery Hose Assembly	High Pressure Hoses available on application	
3 Metre (150 mm) Wire Armoured Flexible Delivery Hose Typical Weight 36.08 kg Typical Working pressure 10 bar	(SY/H) 3194642	
Hose Intake Assembly	On application	



Performance	Max head: 190 m Max flow: 118 l/s Max solid: Clean Water
Weight	7250 kg with fuel 5135 kg without fuel
Dimensions HxWxL (mm) Typical Length including tow bar	2260 x 2385 x 5330
Fuel Tank Capacity	Tank size on application, separate banded tanks available.
Fuel Consumption	Typical fuel consumption on full load @ 1800 rpm: 71.4 litres/hour
Chassis	Skid mounted
Pump Materials	Main pump: Cast Iron/ Impeller: Bronze
Pipe Connections	Suction: 150 NP25 Discharge: 150NP25 Bauer couplings option Suction Only
Engine Type / Power / Speed	Volvo TWD1210P / 265 kW / 1800 rpm
Prime System	Hand Prime
Shaft Seal	Easy repacking Conventional Stuffing Box
Health and Safety	Ear Defenders Gloves Boots/safety footwear Protective clothing